

## EX10-P & LPEX10-P Series

Metal combination unit



### Features

- Dual input voltages 120/347VAC
- Comes pre-assembled for quick, easy installation
- Universal mounting – end, wall or ceiling
- Easy access to wiring entry for all mounting options
- Canopy mounting system designed specifically for ease of installation
- Universal fields-selectable chevrons (knock out)
- Energy efficient – complete unit consumes less than 5W
- CSA certified, meets or exceeds CSA 22.2 No. 141 requirements
- Long life, energy-efficient LED light source, mounted inside the exit housing, not on the faceplate
- **Warranty details at: [www.emergi-lite.ca](http://www.emergi-lite.ca)**



### Extra faceplates

Ordering code	Description
005406-E	Factory white faceplate + red diffuser
005407-E	Black faceplate + red diffuser
005408-E	Silver grey faceplate + red diffuser
005409-E	Factory white faceplate + green diffuser
005410-E	Black faceplate + green diffuser
005411-E	Silver grey faceplate + green diffuser

### Power consumption

Model	AC specs	Wattage capacity				
		30 min	1H00	1H30	2H00	4H00
Exit sign module	Less than 1.5W	-	-	-	-	-
EX10-P	0.15/0.05 A	28	16	12	9	-
EX10-P4	12/347VAC	44	26	18	15	7
LPEX10-P3A	Less than 5W	76	21	15	12	6
LPEX10-P7A	Less than 5W	72	42	30	24	12


### Housing colour



Black



Grey



Factory white

### Typical specifications

Supply and install the **Emergi-Lite® EX10-P & LPEX10-P Series** LED exit sign and power pack combination series. The exit housing and faceplates shall be constructed of steel. The exit sign shall have a maximum depth of 2-1/2". The faceplate(s) shall come standard with knockout chevrons. The light source for the exit sign shall be light-emitting diodes (LED). The LED lamps shall provide illumination in normal and emergency operation and shall be mounted inside the exit housing, not on the face. Red LEDs shall be of **ALINGAP** technology. An LED sensitive diffuser shall be mounted behind the legend to provide the 6" high by 3/4" stroke letters with even illumination. The power pack shall be a completely self-contained emergency unit with its own charger and rechargeable battery. The housing shall be made of steel. The power pack shall include a test switch and high charge pilot light. The equipment shall be designed to furnish exit illumination from the normal AC source. When a power failure occurs the exit sign along with the emergency heads shall illuminate for a minimum of 30 minutes. The power available for emergency lights shall be 28W or as otherwise specified. The heads shall require no tools to adjust and aim. The heads will be of a durable thermoplastic construction and use 6V, 9W and 12V, 9W lamps or as otherwise specified.

The exit sign shall be CSA-C860 approved and meets CSA 22.2 No. 141.

The equipment shall be **Emergi-Lite®** model: \_\_\_\_\_.

### Wire guards


Ordering code	Description
460.0081-E	Wall mount
460.0060-E	Ceiling mount

## EX10-P & LPEX10-P Series

Metal combination unit

### Dimensions

Dimensions are approximate and subject to change.

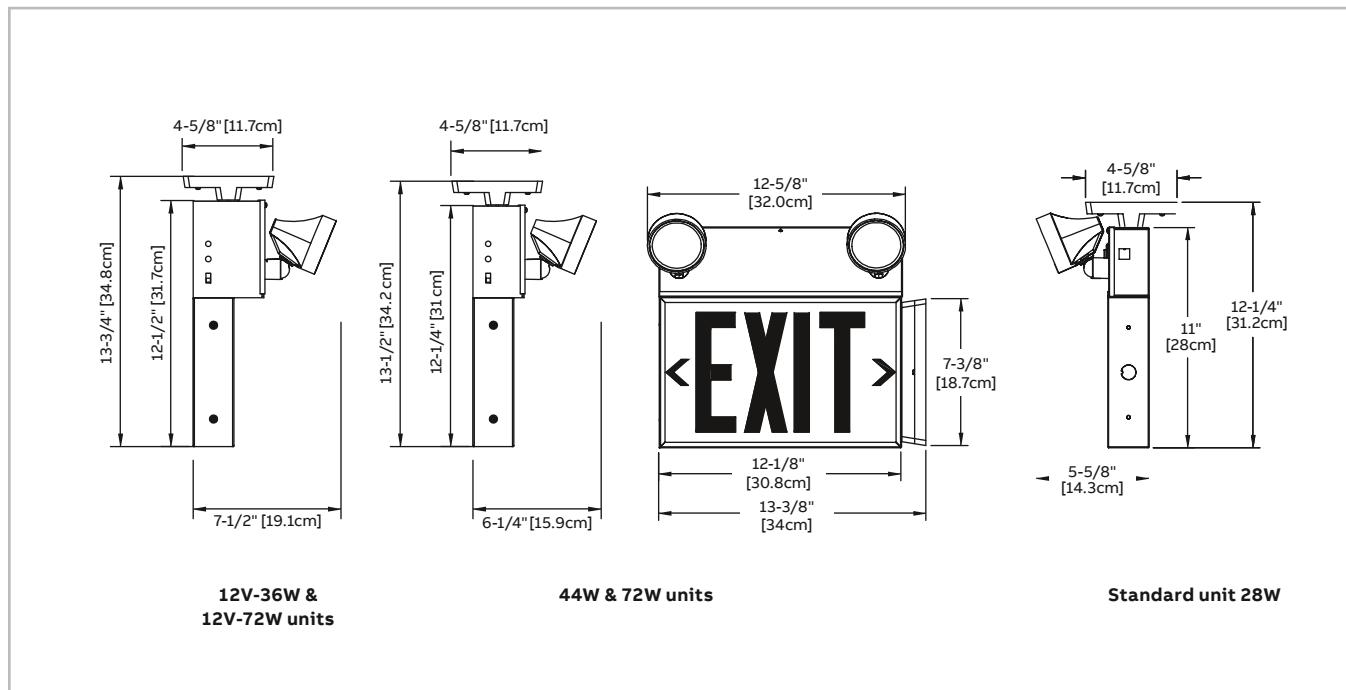

### Ordering information

Series	Colour	Voltage	Powerpack	Charger type	Options	# of heads	Head style/wattage
6 volts	<b>EX10=</b> B= black G= grey <sup>1</sup> W= factory white	<b>Blank=</b> 120/347VAC -2= 120/277VAC	<b>-P=</b> 6V-28W <b>-P4=</b> 6V-44W	<b>Blank=</b> standard <b>NEXRF=</b> wireless NEXUS® system interface <sup>1</sup>	<b>Blank=</b> no options <b>D=</b> time delay (15 minutes) <b>G=</b> green legend <b>TP=</b> tamper-proof screws*	<b>/0=</b> no heads <b>/1=</b> one head <b>/2=</b> two heads	<b>LA=</b> MR16 LED, 6V-4W <b>LB=</b> MR16 LED, 6V-5W
12 volts	<b>LPEX10=</b> B= black G= grey <sup>1</sup> W= factory white	<b>Blank=</b> 120/347VAC -2= 120/277VAC	<b>-P3A=</b> 12V-36W <b>-P7A=</b> 12V-72W	<b>Blank=</b> standard <b>NEXRF=</b> wireless NEXUS® system interface <b>U=</b> auto-diagnostics <b>UN=</b> auto-diagnostics, non-audible	<b>Blank=</b> no options <b>D=</b> time delay (15 minutes) <b>G=</b> green legend <b>TP=</b> tamper-proof screws <sup>1</sup>	<b>/0=</b> no heads <b>/1=</b> one head <b>/2=</b> two heads	<b>LG=</b> MR16 LED, 12V-4W <b>LI=</b> MR16 LED, 12V-5W <b>LJ=</b> MR16 LED, 12V-6W
<b>Example: EX10W-P4/2LB</b>							<sup>1</sup> 990.0119-E= tamper-proof bit (sold separately)