

# 4" Octagonal Boxes

Conduit Knockouts

**IBERVILLE®**



**BCOBEX**

Octagonal box extension.




**BC56111**

Ceiling pan.



**BC54151-K**

Concentric knockouts.

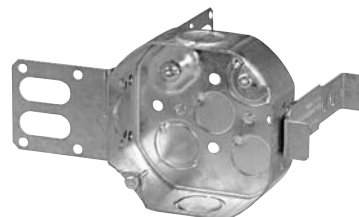

**CI54151-KSSX**

Concentric knockouts. "Wraparound" bracket for 2-1/2" and 3-5/8" steel studs. With integral support bracket.




**BC55151-K**

Extension ring with ground screw. Concentric knockouts.



**BC54171-K**

Concentric knockouts.

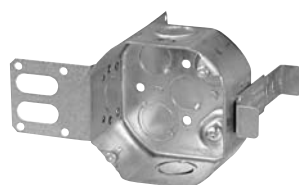

**CI54171-KSSX**

Concentric knockouts. "Wraparound" bracket for 2-1/2" and 3-5/8" steel studs. With integral support bracket.



**CI54171-KSSX-1**

Mounting strap (offset for 2 x 1/2" drywall thicknesses).



**CI55171-K**

Extension ring with ground screw. Concentric knockouts.

## Technical Specifications

Cat. No.	Description						
<b>1/2" Deep — Extensions</b>							
<b>BCOBEX</b>	Extension for octagonal boxes. 1/2" non-adjustable depth. Complete with mounting screws. (5 cu. in.)						
Cat. No.	Capacity (Cu. in.)	Features		Knockouts			
		bracket	Raised Ground Screw	1/2" sides	1/2" bottom	3/4" sides	3/4" bottom
<b>1/2" Deep</b>							
<b>BC56111</b>	5.0	-	yes	-	4	-	-
<b>1-1/2" Deep</b>							
<b>BC54151-K</b>	15.0	-	yes	4	4	2	2
<b>CI54151-KSSX</b>	15.0	"SSX"	yes	2	4	2	2
<b>BC55151-K</b>	15.0	-	no	4	-	2	-
<b>2-1/8" Deep</b>							
<b>BC54171-K</b>	21.0	-	yes	4	4	2	2
<b>CI54171-KSSX</b>	21.0	"SSX"	yes	2	4	2	2
<b>CI54171-KSSX-1</b>	21.0	"SSX-1"	yes	2	4	2	2
<b>CI55171-K</b>	21.0	-	no	4	-	2	-

# 4" Octagonal Boxes


Nonmetallic Sheathed Cable Clamps

**IBERVILLE®**




**BC54151-L**

Prepositioned depth tabs recessed 1/2".



**BC54151-LB**

Side bracket, with holding prongs and prepositioned depth tabs.

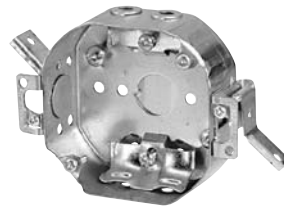


**BC54151-LD**

Swing-arm" rework brackets. Max. wall thickness: 3/4". Max. load capacity: 12 lb. (5.5 kg).



**BC54171-L**



**BC54171-LB**

Side bracket, with holding prongs.



**CI54171-LF**

Ceiling fan box. (Supplied with 2 #10-32 machine screws and star washers.) Max. load capacity: 35 lb. (15.6 kg).

## Technical Specifications

Cat. No.	Capacity (Cu. in.)	Features		Knockouts		Pryouts	
		bracket	Raised Ground Screw	1/2" sides	1/2" bottom	sides	bottom
<b>1-1/2" Deep</b>							
<b>BC54151-L</b>	15.0	-	no	2	1	4	4
<b>BC54151-LB</b>	15.0	"B"	no	1	1	4	4
<b>BC54151-LD</b>	15.0	rework	-	-	1	4	4
<b>2-1/8" Deep</b>							
<b>BC54171-L</b>	21.0	-	-	2	1	4	4
<b>BC54171-LB</b>	21.0	"B"	-	1	1	4	4
<b>CI54171-LF</b>	21.0	-	no	2	1	4	4

**FOR USE WITH NONMETALLIC SHEATHED CABLE ONLY.**

**NOTE:** CEC 2006 rule 30-302: 4) Where the weight of a luminaire does not exceed 23 kg (50 lbs), the luminaire shall be permitted to be supported by a ceiling outlet box attached directly to the building structure or by a ceiling outlet box attached to a bar hanger




# 4" Octagonal Boxes

Armoured and Nonmetallic Sheathed Cable Clamps

**IBERVILLE®**



**BC54151-LA**

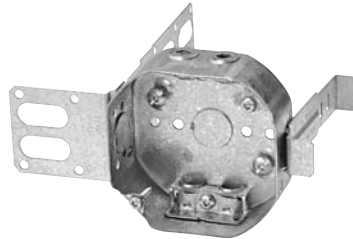


**BC54151-LSSAX**

"Wraparound" bracket for 2-1/2" and 3-5/8" steel studs. With integral support bracket.



**BC54171-LA**

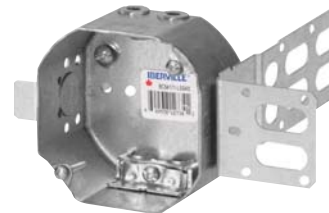

**BC54171-LSSAX**


## Technical Specifications

Cat. No.	Capacity (Cu. in.)	Features		Knockouts		Pryouts	
		bracket	Raised Ground Screw	1/2" sides	1/2" bottom	sides	bottom
<b>1-1/2" Deep</b>							
<b>BC54151-LA</b>	15.0	-	-	2	1	4	-
<b>BC54151-LSSAX</b>	15.0	"SSX"	-	-	1	4	-
<b>2-1/8" Deep</b>							
<b>BC54171-LA</b>	21.0	-	-	2	1	4	-
<b>BC54171-LSSAX</b>	21.0	"SSX"	-	-	1	4	-

# 4" Octagonal Boxes

Covers


**IBERVILLE®**



**BC54-C-1**




**BC54-C-6**



**CI54-C-64**



**BC54-C-65**



**BC54-C-94**



**BC54-COV**



**BC54-COV-1**

## Technical Specifications

Cat. No.	Description
<b>4" Round Covers</b>	
<b>BC54-C-1</b>	Flat blank.
<b>BC54-C-6</b>	Flat with 1/2" conduit knockout.
<b>CI54-C-64</b>	Flat for 1-13/32" diameter. 15 AMP. single receptacle. Device mounting screws included.
<b>BC54-C-65</b>	Flat for duplex receptacle. Device mounting screw included.
<b>BC54-C-94</b>	Flat for toggle switch. Device mounting screws included.
<b>5" Round Covers (White Enamel Paint)</b>	
<b>BC54-COV</b>	Flat with 1/2" conduit knockout. Mounting screws included.
<b>BC54-COV-1</b>	Flat blank. Mounting screws included.

