

4" Octagonal Boxes

Conduit Knockouts

IBERVILLE®



BC0BEX

Octagonal box extension.




BC56111

Ceiling pan.



BC54151-K

Concentric knockouts.

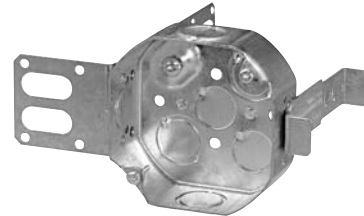

CI54151-KSSX

Concentric knockouts.
"Wraparound" bracket for
2-1/2" and 3-5/8" steel studs.
With integral support bracket.




BC55151-K

Extension ring with ground
screw.
Concentric knockouts.



BC54171-K

Concentric knockouts.



CI54171-KSSX

Concentric knockouts.
"Wraparound" bracket for
2-1/2" and 3-5/8" steel studs.
With integral support bracket.



CI55171-K

Extension ring with ground
screw.
Concentric knockouts.

Technical Specifications

Cat. No.	Description						
1/2" Deep — Extensions							
BC0BEX	Extension for octagonal boxes. 1/2" non-adjustable depth. Complete with mounting screws. (5 cu. in.)						
Cat. No.	Capacity (Cu. in.)	Features		Knockouts			
		bracket	Raised Ground Screw	1/2" sides	1/2" bottom	3/4" sides	3/4" bottom
1/2" Deep							
BC56111	5.0	-	yes	-	4	-	-
1-1/2" Deep							
BC54151-K	15.0	-	yes	4	4	2	2
CI54151-KSSX	15.0	"SSX"	yes	2	4	2	2
BC55151-K	15.0	-	no	4	-	2	-
2-1/8" Deep							
BC54171-K	21.0	-	yes	4	4	2	2
CI54171-KSSX	21.0	"SSX"	yes	2	4	2	2
CI55171-K	21.0	-	no	4	-	2	-

4" Octagonal Boxes


Nonmetallic Sheathed Cable Clamps

IBERVILLE®



BC54151-L

Prepositioned depth tabs recessed 1/2".



BC54151-LB

Side bracket, with holding prongs and prepositioned depth tabs.



BC54151-LD


"Swing-arm" rework brackets. Max. wall thickness: 3/4". Max. load capacity: 12 lb. (5.5 kg).



BC54151LV



BC54171-L



BC54171-LB

Side bracket, with holding prongs.



CI54171-LF

Ceiling fan box. (Supplied with 2 #10-32 machine screws and star washers.) Max. load capacity: 35 lb. (15.6 kg).



BC54171LV

Technical Specifications

Cat. No.	Capacity (Cu. in.)	Features		Knockouts		Pryouts	
		bracket	Raised Ground Screw	1/2" sides	1/2" bottom	sides	bottom
1-1/2" Deep							
BC54151-L	15.0	-	no	2	1	4	4
BC54151-LB	15.0	"B"	no	1	1	4	4
BC54151-LD	15.0	rework	-	-	1	4	4
BC54151-LV	15.0	"LV"	-	1	1	4	4
2-1/8" Deep							
BC54171-L	21.0	-	-	2	1	4	4
BC54171-LB	21.0	"B"	-	1	1	4	4
CI54171-LF	21.0	-	no	2	1	4	4
BC54171-LV	21.0	"LV"	no	1	1	4	4

FOR USE WITH NONMETALLIC SHEATHED CABLE ONLY.


NOTE: CEC 2006 rule 30-302: 4) Where the weight of a luminaire does not exceed 23 kg (50 lbs), the luminaire shall be permitted to be supported by a ceiling outlet box attached directly to the building structure or by a ceiling outlet box attached to a bar hanger.




4" Octagonal Boxes

Armoured and Nonmetallic Sheathed Cable Clamps

IBERVILLE®



BC54151-LA

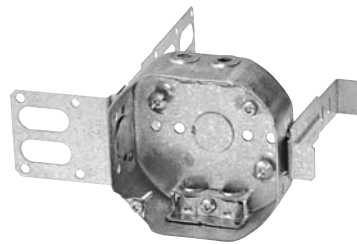

BC54151-LSSAX

"Wraparound" bracket for
2-1/2" and 3-5/8" steel studs.
With integral support bracket.


Technical Specifications

Cat. No.	Capacity (Cu. in.)	Features		Knockouts		Pryouts	
		bracket	Raised Ground Screw	1/2" sides	1/2" bottom	sides	bottom
1-1/2" Deep							
BC54151-LA	15.0	-	-	2	1	4	-
BC54151-LSSAX	15.0	"SSX"	-	-	1	4	-

4" Octagonal Boxes

Covers


IBERVILLE®




BC54-C-1




BC54-C-6



CI54-C-64



BC54-C-65



BC54-C-94



BC54-COV



BC54-COV-1

Technical Specifications

Cat. No.	Description
4" Round Covers	
BC54-C-1	Flat blank.
BC54-C-6	Flat with 1/2" conduit knockout.
CI54-C-64	Flat for 1-13/32" diameter. 15 AMP. single receptacle. Device mounting screws included.
BC54-C-65	Flat for duplex receptacle. Device mounting screw included.
BC54-C-94	Flat for toggle switch. Device mounting screws included.
5" Round Covers (White Enamel Paint)	
BC54-COV	Flat with 1/2" conduit knockout. Mounting screws included.
BC54-COV-1	Flat blank. Mounting screws included.

