


The Marrette[®] Set-Screw is a two-piece, pressure type connector, featuring a solid brass insert with a screw-on insulating cap. It's the perfect choice when changing a motor, adding a circuit, conducting instrument testing or simply lashing-up temporary wiring.

External Cap

- Made of rugged, thermoplastic polymer material 150°C rated.
- Insulator cap locks securely in place to safeguard against accidental loosening in high vibration applications.

Inner Sleeve + Screw

- Choice of Slotted or Robertson screw-driver installation. When tightened into the insert, provides a solid pressure type connection on all approved wire combinations.
- No need to "re-strip" wires when rewiring. Simply loosen set screw to remove non-twisted wires.
- Brass sleeve + set-screw help resist corrosion.
- Approved for circuits up to 600V, and lighting fixtures and signs up to 1000V.
- For copper conductor only.
- Convenient packaging - sized right and job-site ready!

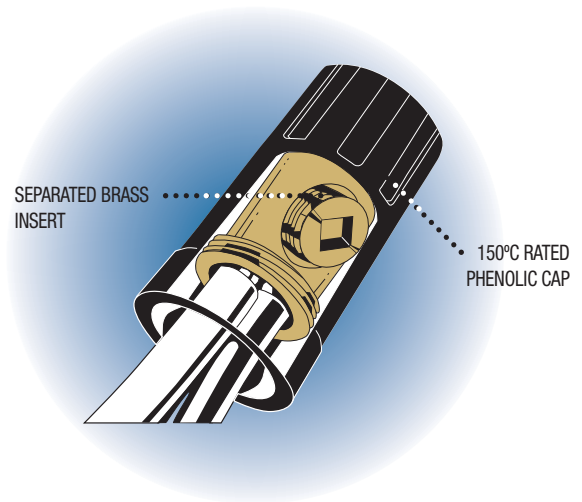

Ordering Information

Cat. No.	Description	AWG Wire Range					
		18	16	14	12	10	8
1SHD, 1SHP	Cap and insert combination screw & brass barrel	Min.: 2 #18		Max.: 1 #18 + 3 #14			
1SHi	Insert screw & brass barrel only	Min.: 2 #18		Max.: 1 #18 + 3 #14			
2SHD, 2SHP	Cap and insert combination screw & brass barrel			Min.: 2 #14		Max.: 1 #12 + 2 #10	
2SHi	Insert screw & brass barrel only			Min.: 2 #14		Max.: 1 #12 + 2 #10	

Note: Refer to pages 22 and 23 for related Wire Combination Reference Guides.

Packaging Options

	Catalogue Number	Packaging Format	Quantity per Package	Std. Pkg.
1SH	1SHP	Propak	100	1,000 Units
	1SHD	Flip-Pak	500	500 Units
	1SHi	Carton	100	1,000 Units
2SH	2SHP	Propak	50	500 Units
	2SHD	Flip-Pak	500	500 Units
	2SHi	Carton	50	1,000 Units