


The Marrette[®] Green grounding connector accommodates 14 to 10 AWG ground wires.

External Cap

- Made of tough durable polypropylene and rated 105°C to withstand high installation pressure.
- Long-Wing™ design affords installer good leverage to make ground connections.
- Swept back wing creates less box fill.
- Top exit hole to allow one main grounding conductor to attach to grounding screw, from a large grounding wire bundle.

Inner Spring

- Square wire construction gives a positive conductor bite to grounding wire.
- Unique copper coated spring helps resist corrosion.
- CSA approved for solid copper conductor only
- UL approved for solid or stranded copper conductor
- Convenient packaging - sized right and job-site ready!

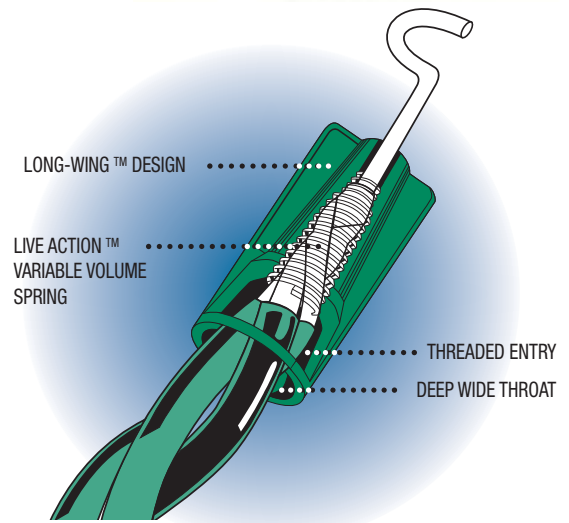

Ordering Information

Model	Colour	AWG Wire Range							
		22	20	18	16	14	12	10	8
1410	green								
		Min.: 2 #14 Max.: 1 #14 + 3 #12 + 1 #10							

Note: Refer to pages 22 and 23 for related Wire Combination Reference Guides.

Packaging Options

	Catalogue Number	Packaging Format	Quantity per Package	Std. Pkg. (Min./Mult.)
1410	1410P	Propak Releasable Bag	100	1,000 Units
	1410KP		250	2,500 Units