



# Ty-Duct™

## Wide Slot Wiring Duct—Halogen Free


Perfect for high-temperature areas!

### Wide Slot Wiring Duct—Halogen-Free


- Halogen-free construction
- Higher temperature rating than PVC
- Wide fingers and slots increase rigidity and enable for insertion of bundles
- Non-slip cover does not slide easily and resists vibration
- Rounded edges keep hands and wires free of abrasion
- Dual score lines are designed to yield clean breakoffs at the base of the slot and the duct
- V-shaped slot lead-in enables easier and faster wire installation

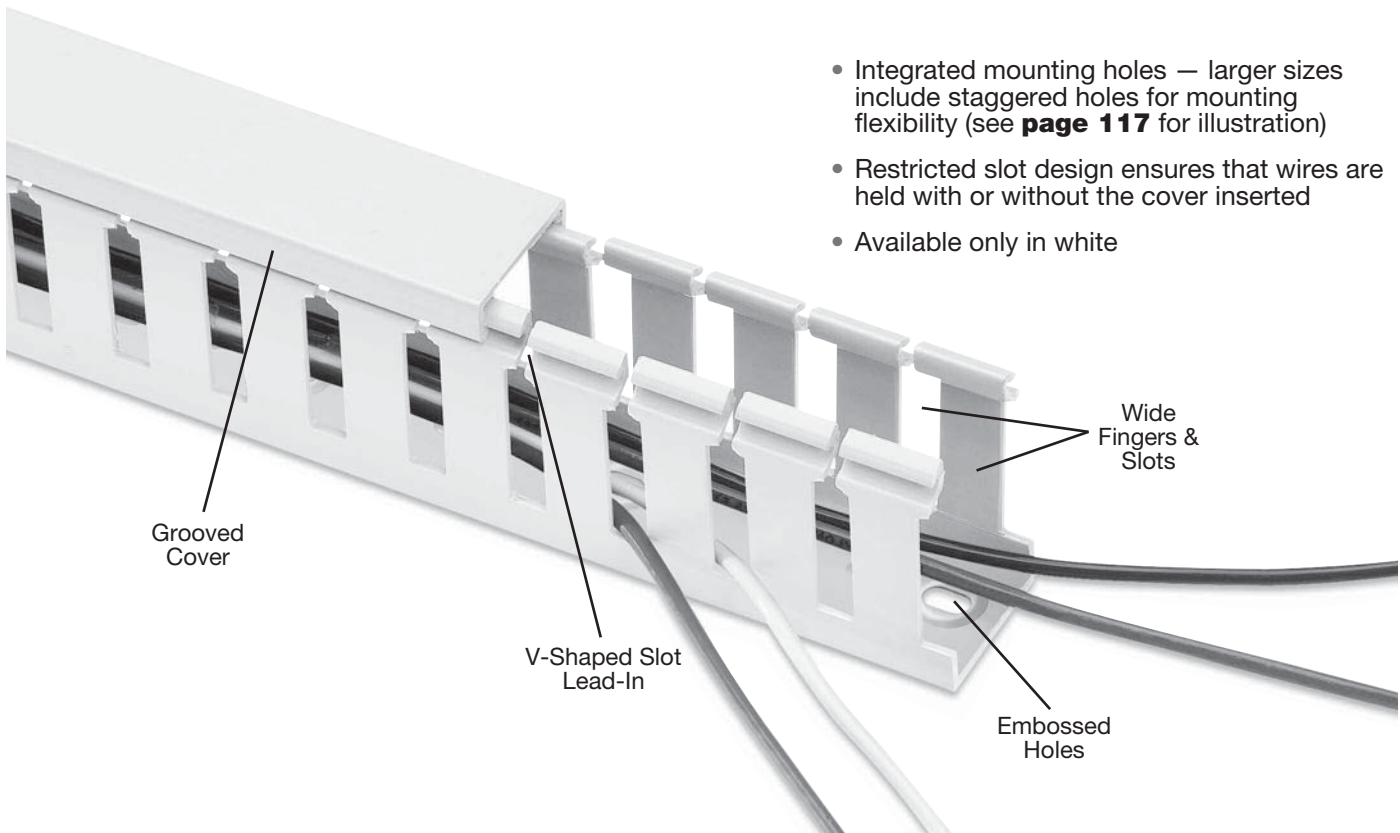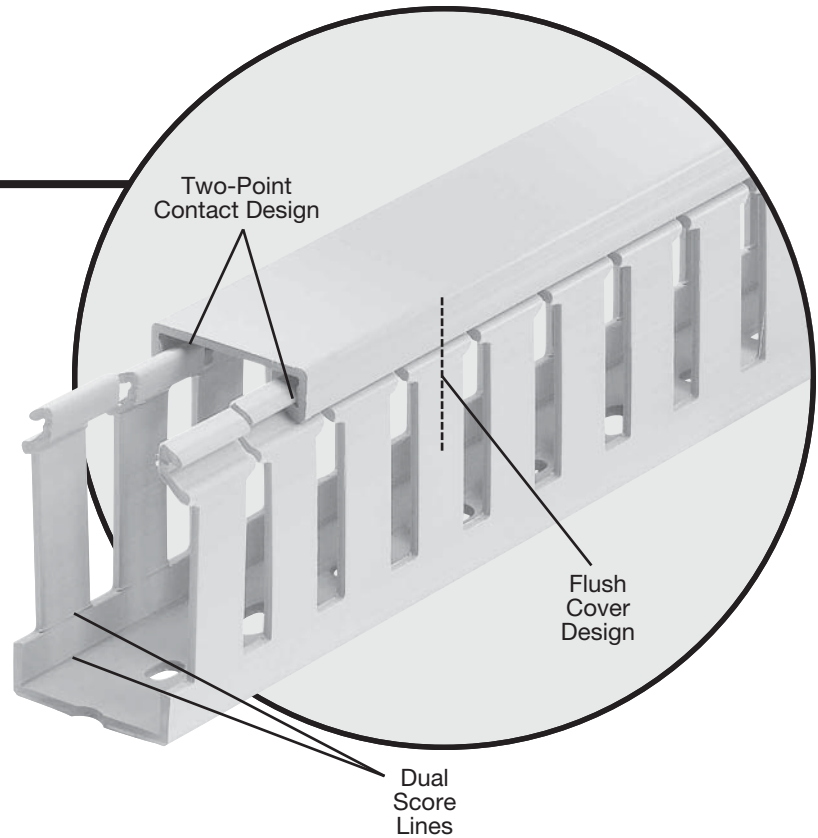

## Wide Slot Wiring Duct—Halogen Free




Front View w/Cover

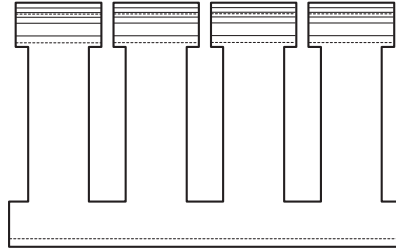

Side View

For a complete listing of Wide Slot dimensional details see page 117.

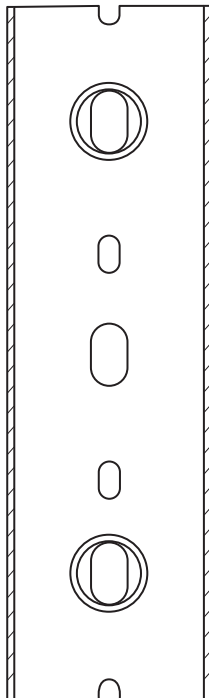

Bottom View

W = White

CAT. NO.	DESCRIPTION	SIZE (W x H)		COVER CAT. NO.	DUCT STD. CTN. QTY	COVER STD. CTN. QTY	LENGTH (FT.)
		IN.	MM				
<b>TY1X1WHW6</b>	1 x 1 Halogen-Free White Duct	1.25 x 1.14	31.8 x 29.0		120		
<b>TY1X15WHW6</b>	1 x 1.5 Halogen-Free White Duct	1.25 x 1.60	31.8 x 40.6		120		
<b>TY1X2WHW6</b>	1 x 2 Halogen-Free White Duct	1.25 x 2.10	31.8 x 53.3	<b>TY1CHW6</b>	120	120	6
<b>TY1X3WHW6</b>	1 x 3 Halogen-Free White Duct	1.25 x 3.05	31.8 x 77.5		120		
<b>TY1X4WHW6</b>	1 x 4 Halogen-Free White Duct	1.25 x 4.37	31.8 x 111.0		60		
<b>TY15X15WHW6</b>	1.5 x 1.5 Halogen-Free White Duct	1.75 x 1.60	44.5 x 40.6		120		
<b>TY15X2WHW6</b>	1.5 x 2 Halogen-Free White Duct	1.75 x 2.10	44.5 x 53.3	<b>TY15CHW6</b>	120	120	6
<b>TY15X3WHW6</b>	1.5 x 3 Halogen-Free White Duct	1.75 x 3.05	44.5 x 77.5		120		
<b>TY15X4WHW6</b>	1.5 x 4 Halogen-Free White Duct	1.75 x 4.37	44.5 x 111.0		60		
<b>TY2X1WHW6</b>	2 x 1 Halogen-Free White Duct	2.25 x 1.24	57.2 x 31.5		120		
<b>TY2X2WHW6</b>	2 x 2 Halogen-Free White Duct	2.25 x 2.19	57.2 x 55.6	<b>TY2CHW6</b>	120	120	6
<b>TY2X3WHW6</b>	2 x 3 Halogen-Free White Duct	2.25 x 3.14	57.2 x 79.8		60		
<b>TY2X4WHW6</b>	2 x 4 Halogen-Free White Duct	2.25 x 4.46	57.2 x 113.3		60		
<b>TY25X3WHW6</b>	2.5 x 3 Halogen-Free White Duct	2.75 x 3.14	69.9 x 79.8	<b>TY25CHW6</b>	60	120	6
<b>TY3X1WHW6</b>	3 x 1 Halogen-Free White Duct	3.25 x 1.24	82.6 x 31.5		120		
<b>TY3X2WHW6</b>	3 x 2 Halogen-Free White Duct	3.25 x 2.19	82.6 x 55.6		60		
<b>TY3X3WHW6</b>	3 x 3 Halogen-Free White Duct	3.25 x 3.14	82.6 x 79.8	<b>TY3CHW6</b>	60	120	6
<b>TY3X4WHW6</b>	3 x 4 Halogen-Free White Duct	3.25 x 4.46	82.6 x 113.3		60		
<b>TY3X5WHW6</b>	3 x 5 Halogen-Free White Duct	3.25 x 5.15	82.6 x 130.8		60		
<b>TY4X2WHW6</b>	4 x 2 Halogen-Free White Duct	4.25 x 2.19	108.0 x 55.6		60		
<b>TY4X3WHW6</b>	4 x 3 Halogen-Free White Duct	4.25 x 3.14	108.0 x 79.8	<b>TY4CHW6</b>	60	120	6
<b>TY4X4WHW6</b>	4 x 4 Halogen-Free White Duct	4.25 x 4.46	108.0 x 113.3		30		
<b>TY4X5WHW6</b>	4 x 5 Halogen-Free White Duct	4.25 x 5.15	108.0 x 130.8		30		

Standard lengths are 6 feet.

To order duct without mounting holes, add suffix NM to catalogue number.

**Example:** TY1XWHW6NM is a 1" x 1" wide slot halogen-free white duct with no mounting holes.

Vinyl duct is UL® Recognized , CSA Certified and meets the JIC requirements.

PVC vinyl duct is UL® Recognized , CSA Certified and CE Compliant.