

Wiring Duct and Accessories



Original Slot Duct (chlorine free) Noryl®

Noryl Cat. No.		Nom. Size		Dimensions-Inches									
Duct	Cover	W	H	A	B	C	D	E	F	G	H	J	K
-	-	.50	.50	.62	.50	.75	.56	.62	.38	on ctr.	.50	-	-
-	-	.50	1.00	.62	1.00	.75	1.10	.73	.63	on ctr.	.50	.31	.20
-	-	.50	1.25	.62	1.25	.75	1.35	.73	.52	on ctr.	.50	.31	.20
-	-	.75	.75	.86	.75	1.06	.88	.62	.38	on ctr.	.50	-	-
-	-	.75	1.25	.86	1.25	1.06	1.35	.73	.52	on ctr.	.50	.31	.20
-	-	.75	1.50	.86	1.50	1.06	1.60	.73	1.00	on ctr.	.50	.31	.20
51000	-	1.00	1.00	1.13	1.00	1.38	1.10	.73	.52	on ctr.	.50	.31	.20
51120	-	1.00	1.25	1.13	1.25	1.38	1.35	.73	.52	on ctr.	.50	.31	.20
51150	-	1.00	1.50	1.13	1.50	1.38	1.60	.73	1.00	on ctr.	.50	.31	.20
51020	50010	1.00	2.00	1.18	2.00	1.38	2.10	.73	1.25	on ctr.	.50	.38	.38
51030	-	1.00	3.00	1.18	3.00	1.38	3.10	1.00	2.25	on ctr.	.50	.38	.38
51040	-	1.00	4.00	1.20	4.00	1.38	4.10	1.00	3.25	on ctr.	.50	.38	.38
51510	-	1.50	1.00	1.63	1.00	1.88	1.10	.73	.52	on ctr.	.50	.31	.20
-	-	1.50	1.50	1.63	1.50	1.88	1.60	.73	1.00	on ctr.	.50	.31	.20
51520	50015	1.50	2.00	1.68	2.00	1.88	2.10	.73	1.25	on ctr.	.50	.38	.38
51530	-	1.50	3.00	1.68	3.00	1.88	3.10	1.00	2.25	on ctr.	.50	.38	.38
51540	-	1.50	4.00	1.70	4.00	1.88	4.10	1.00	3.25	on ctr.	.50	.38	.38
52010	-	2.00	1.00	2.13	1.00	2.38	1.10	.73	.52	.50	.50	.31	.20
52150	-	2.00	1.50	2.13	1.50	2.38	1.60	.73	1.00	.50	.50	.31	.20
52020	-	2.00	2.00	2.18	2.00	2.38	2.10	.73	1.25	.50	.50	.38	.38
52030	50020	2.00	3.00	2.18	3.00	2.38	3.10	1.00	2.25	.50	.50	.38	.38
52040	-	2.00	4.00	2.20	4.00	2.38	4.10	1.00	3.25	.50	.50	.38	.38
52050	-	2.00	5.00	2.20	5.00	2.38	5.10	1.50	4.25	.50	.75	.50	.38
-	-	2.50	3.00	2.68	3.00	2.88	3.10	1.00	2.25	on ctr.	.50	.38	.38
-	-	3.00	1.00	3.13	1.00	3.38	1.10	.73	.52	1.00	.50	.31	.20
53120	-	3.00	1.25	3.13	1.25	3.38	1.35	.73	.52	1.00	.50	.31	.20
-	-	3.00	2.00	3.18	2.00	3.38	2.10	.73	1.25	1.00	.50	.38	.38
53030	50030	3.00	3.00	3.18	3.00	3.38	3.10	1.00	2.25	1.00	.50	.38	.38
53040	-	3.00	4.00	3.20	4.00	3.38	4.10	1.00	3.25	1.00	.50	.38	.38
53050	-	3.00	5.00	3.20	5.00	3.38	5.10	1.50	4.25	1.00	.75	.50	.38
-	-	4.00	1.00	4.20	1.00	4.38	1.10	.73	.52	1.50	.50	.31	.2
54020	-	4.00	2.00	4.20	2.00	4.38	2.10	.73	1.25	1.50	.50	.38	.38
54030	50040	4.00	3.00	4.18	3.00	4.38	3.10	1.00	2.25	1.50	.50	.38	.38
54040	-	4.00	4.00	4.20	4.00	4.38	4.10	1.00	3.25	1.50	.50	.38	.38
54050	-	4.00	5.00	4.20	5.00	4.38	5.10	1.50	4.25	1.50	.75	.50	.38

• Standard lengths are 6 feet


To order Adhesive-backed Duct, add suffix A to Catalogue Number. Example: 52020A is a 2" x 2" grey duct with adhesive backing. Shelf life for adhesive is 1 year.

Note: Noryl® duct is available in oyster white only. UL 94 V-1


Noryl® is a registered trademark of General Electric Co.

Temp. rating: 95°C


Low temp. (under IZOD impact test): -40°C

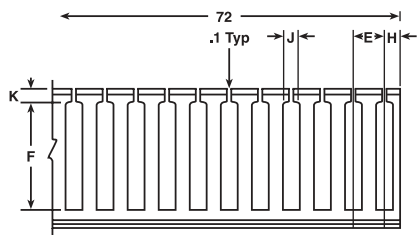

Typical Side View



Overall Height Cover Installed

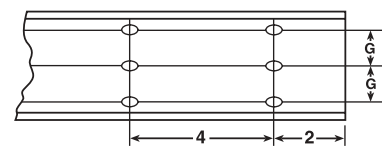

Bottom Mounting Holes, 1/2 x 3/16

Wiring Duct and Accessories



Solid Wall Duct (chlorine free) Noryl®


Noryl Cat. No.		Nom. Size		Dimensions-Inches				
Duct	Cover	W	H	A	B	C	D	E
-		.50	.50	.62	.50	.75	.56	on ctr.
-		.50	1.00	.62	1.00	.75	1.10	on ctr.
-		.50	1.25	.62	1.25	.75	1.35	on ctr.
-		.50	1.75	.62	1.75	.75	1.88	on ctr.
-		.50	2.00	.62	2.00	.75	2.10	on ctr.
-		.75	.75	.86	.75	1.06	.88	on ctr.
-		.75	1.00	.86	.75	1.06	1.10	on ctr.
-		.75	1.25	.86	1.25	1.06	1.35	on ctr.
-		.75	1.50	.86	1.50	1.06	1.60	on ctr.
-		.75	2.00	.86	2.00	1.06	2.10	on ctr.
U51000		1.00	1.00	1.13	1.00	1.38	1.10	on ctr.
U51125		1.00	1.25	1.13	1.25	1.38	1.35	on ctr.
U50115		1.00	1.50	1.13	1.50	1.38	1.60	on ctr.
U50102	50010	1.00	2.00	1.18	2.00	1.38	2.10	on ctr.
U50103		1.00	3.00	1.18	3.00	1.38	3.10	on ctr.
U50104		1.00	4.00	1.20	4.00	1.38	4.10	on ctr.
-		1.50	1.00	1.63	1.00	1.88	1.10	on ctr.
U50155		1.50	1.50	1.63	1.50	1.88	1.60	on ctr.
U50152	50015	1.50	2.00	1.68	2.00	1.88	2.10	on ctr.
U50153		1.50	3.00	1.68	3.00	1.88	3.10	on ctr.
U50154		1.50	4.00	1.70	4.00	1.88	4.10	on ctr.
U50201		2.00	1.00	2.13	1.00	2.38	1.10	.50
U50215		2.00	1.50	2.13	1.50	2.38	1.60	.50
U50202		2.00	2.00	2.18	2.00	2.38	2.10	.50
U50203	50020	2.00	3.00	2.18	3.00	2.38	3.10	.50
U50204		2.00	4.00	2.20	4.00	2.38	4.10	.50
U50205		2.00	5.00	2.20	5.00	2.38	5.10	.50
-		2.50	3.00	2.68	3.00	2.88	3.10	on ctr.
-		3.00	1.00	3.13	1.00	3.38	1.10	1.00
U53125		3.00	1.25	3.13	1.25	3.38	1.35	on ctr.
-		3.00	2.00	3.18	2.00	3.38	2.10	1.00
U50302	50030	3.00	3.00	3.18	3.00	3.38	3.10	1.00
U50304		3.00	4.00	3.20	4.00	3.38	4.10	1.00
U50305		3.00	5.00	3.20	5.00	3.38	5.10	1.00
-		4.00	1.00	4.20	1.00	4.38	1.10	1.50
U50402		4.00	2.00	4.18	2.00	4.38	2.10	1.50
U50403	50040	4.00	3.00	4.18	3.00	4.38	3.10	1.50
U50404		4.00	4.00	4.20	4.00	4.38	4.10	1.50
U50405		4.00	5.00	4.20	5.00	4.38	5.10	1.50

• Standard lengths are 6 feet.


Adhesive backed duct in solid wall style is a custom order. Consult customer service for availability.

Note: Noryl® duct is available in oyster white only. UL 94 V-1


Noryl® is a registered trademark of General Electric Co.

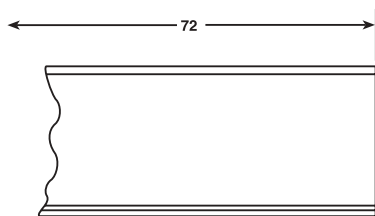

Typical Side View

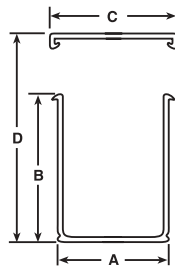

Overall Height Cover Installed

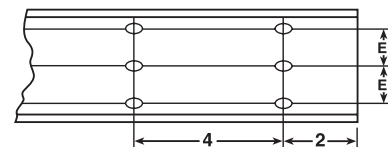

Bottom Mounting Holes, 1/2 x 3/16

Vinyl duct is UL Recognized , UL 94 V-0 rated CSA Certified and meets the JIC requirements.