

# T&B Conduit Fittings

## Stainless Steel Liquidtight Conduit Connectors



5262 Series  
Sealing Ring Gasket  
sold separately

### The Strength of Steel — with Superior Corrosion-Resistance!

Until now, there's been no ideal conduit fitting solution for use in heavily corrosive environments. Traditional metallic fittings corrode and require frequent replacement. Non-metallic fittings offer less strength, lower UV-resistance, and don't stand up well in extreme temperatures.

T&B Stainless Steel Liquidtight Conduit Connectors are constructed of 304 stainless steel to resist corrosion while offering high strength, high UV-resistance, and high endurance. Choose among a full range of fittings in straight, 45°, and 90° angled configurations for 3/8" to 2" conduit sizes. Look for the distinctive blue insulator and sealing ring for assurance of T&B quality.

- Ideal for industrial MRO and OEM applications in food and beverage, pharmaceutical, petrochemical, waste water, salt water, and other corrosive environments
- Connects metallic-cored liquidtight conduit to a box or enclosure
- 304 stainless steel body and gland-nut resists corrosion far better than other metallic fittings
- Stronger, more UV-resistant than nonmetallic fittings
- Available in straight, 45°, and 90° angled configurations to fit conduit from 3/8" to 2"
- UL® Listed Ratings: 3, 3R, 4, 4X
- 5262 Sealing Ring Gasket (sold separately) includes a stainless steel retaining ring to prevent elongation of the gasket and is made from Santoprene™ material, ensuring a superior seal



### Liquidtight Conduit Connectors

Cat. Number	Size	Dimensions			Std. Pkg. Qty.	UPC Number	Cat. Number	Size	Dimensions			Std. Pkg. Qty.	UPC Number
		A	B	C					A	B	C		
<b>Straight</b>							<b>90° Angled</b>						
5331SST *	3/8"	1.360"	1.02"	—	25	78621097764	5351SST *	3/8"	1.95"	1.02"	1.84"	25	78621097768
5332SST	1/2"	1.360"	1.18"	—	25	78621084482	5352SST	1/2"	2.12"	1.18"	2.07"	25	78621097769
5333SST	3/4"	1.388"	1.37"	—	25	78621074480	5353SST	3/4"	2.47"	1.37"	2.44"	10	78621097770
5334SST	1"	1.562"	1.77"	—	5	78621096334	5354SST	1"	2.98"	1.77"	2.90"	5	78621097771
5335SST	1 1/4"	1.720"	2.12"	—	20	78621097765	5355SST	1 1/4"	3.53"	2.12"	3.36"	5	78621097772
5336SST	1 1/2"	2.020"	2.48"	—	5	78621097766	5356SST	1 1/2"	4.16"	2.48"	3.88"	2	78621097773
5337SST	2"	2.335"	3.04"	—	2	78621097767	5357SST	2"	8.60"	3.04"	4.69"	1	78621097774
<b>45° Angled</b>							<b>Sealing Gasket</b>						
5341SST *	3/8"	1.84"	1.02"	1.43"	25	78621097775	5261	3/8"	—	—	—	50	78621005261
5342SST	1/2"	1.62"	1.18"	2.04"	25	78621097776	5262	1/2"	—	—	—	50	78621005262
5343SST	3/4"	2.32"	1.37"	1.93"	10	78621097777	5263	3/4"	—	—	—	25	78621005263
5344SST	1"	2.86"	1.77"	2.37"	5	78621097778	5264	1"	—	—	—	25	78621005264
5345SST	1 1/4"	3.33"	2.12"	2.80"	5	78621097779	5265	1 1/4"	—	—	—	5	78621005265
5346SST	1 1/2"	3.94"	2.48"	3.39"	2	78621097780	5266	1 1/2"	—	—	—	5	78621005266
5347SST	2"	4.73"	3.04"	4.23"	1	78621097781	5267	2"	—	—	—	5	78621005267

Locknut not included

\* 3/8" conduit fitting has 3/8" hub

# T&B Conduit Fittings

## Flexible Cord and Cable Fittings

### The Ranger® Series — Nylon Cord Grip Fitting




#### A T&B “RANGER” Exclusive

**Smaller shape: 30% smaller envelope**

**Wide range: twice the cable range**


- Reduced size means fittings can be placed closer together.
- Wider range means one fitting can cover twice the cable range of others.
- Nonmetallic means corrosion resistance.

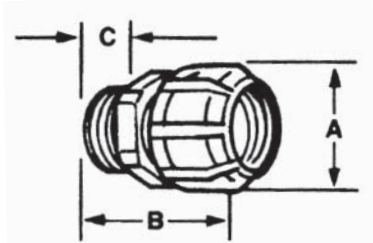

- Weather Stabilized Nylon
- U.L. 94-V2
- Temperature Rating: -34PC to +105PC
- Meets Coast Guard CG293
- New Reduced Size
- Smaller Footprint

### Nonmetallic Liquidtight Strain Relief Fitting—Straight

Cat. No.	Trade or Hub Size	Throat Diam.	Cord Range	Dimensions (in.)		
				A	B	C
2920NM	1/2"	9/16	.125-.375	1-7/32	2-1/8	5/8
2921NM	1/2"	9/16	.310-.560	1-7/32	2-1/8	5/8
2922NM	1/2"	9/16	.500-.750	1-13/32	2-5/32	5/8
2930NM	3/4"	3/4	.125-.375	1-13/32	2-3/16	5/8
2931NM	3/4"	3/4	.310-.560	1-13/32	2-3/16	5/8
2932NM	3/4"	3/4	.500-.750	1-13/32	2-3/16	5/8
2940NM	1"	29/32	.310-.560	1-13/32	2-11/32	25/32
2941NM	1"	29/32	.500-.750	1-13/32	2-11/32	25/32
2942NM	1"	29/32	.700-.950	1-43/64	2-3/8	25/32

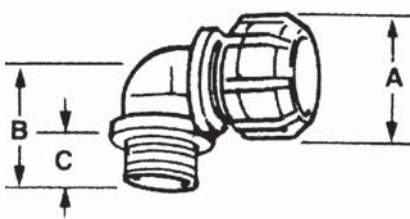

90° elbow, new reduced size, smaller footprint.

- Weather Stabilized Nylon
- U.L. 94-V2
- Temperature Rating: -34PC to +105PC
- Meets Coast Guard CG293

### Nonmetallic Liquidtight Strain Relief fitting—90° Elbow



Cat. No.	Trade or Hub Size	Throat Diam.	Cord Range	Dimensions (in.)		
				A	B	C
4960NM	1/2"	9/16	.125-.375	1-7/32	1-1/4	5/8
4961NM	1/2"	9/16	.310-.560	1-7/32	1-1/4	5/8
4970NM	3/4"	3/4	.125-.375	1-13/32	1-3/8	5/8
4971NM	3/4"	3/4	.310-.560	1-13/32	1-3/8	5/8
4972NM	3/4"	3/4	.500-.750	1-13/32	1-3/8	5/8