


TECK CABLE FITTINGS

Bond Star® – Grounding Locknut

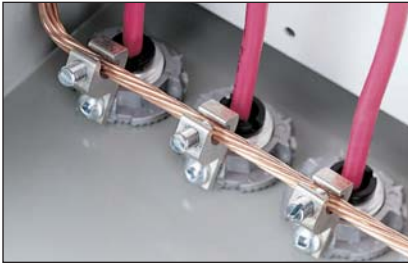


Extreme grounding for data and control applications.

For data and control panel applications or any other installation that is highly sensitive to floating voltage differences, the complete range of StarTeck Extreme® fittings (1/2 inch to 4-inch hub sizes) is also available with a 3-position grounding locknut including an open-sided lay-in lug made of tin-plated aluminum. With a #4-14 AWG wire range, the CSA and UL approved grounding lug can be positioned on the most accessible of the three grounding locations on the

circumference of the installed grounding locknut. When installation requires multiple incoming cables, each individual lug terminating the connections can be “daisy chain” bonded to the grounding bus, ensuring the same electrical potential throughout the cables.

BondStar® grounding locknuts can also be used with the complete range of Thomas & Betts teck cable fittings. To order individually, use the catalogue numbers shown on page 21.

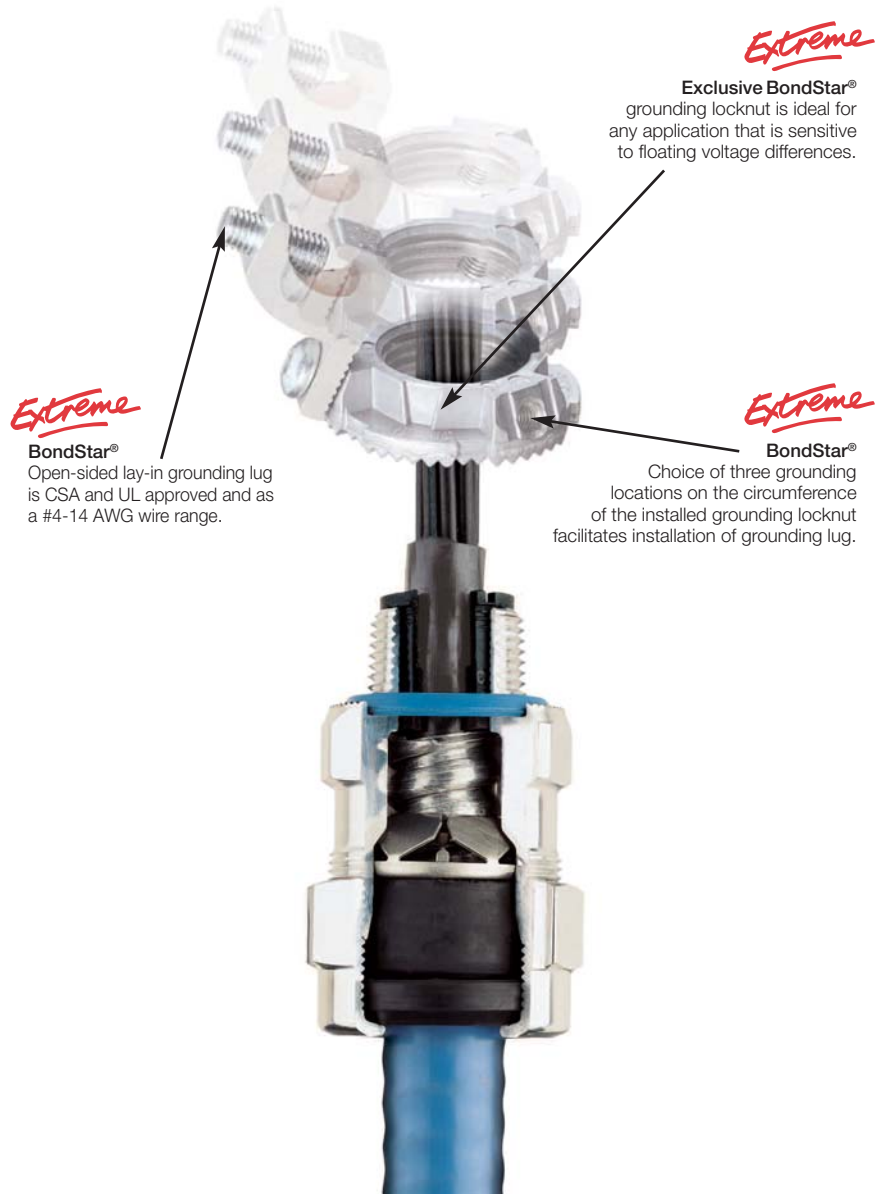

TECK CABLE FITTINGS

Bond Star® – Grounding Locknut



StarTeck Extreme® Fittings with BondStar® Grounding Locknut



Cat. No.	Hub Sizes (N.P.T.) (in.)	Obsoleted Items
STE050-DATAGRL	1/2	STE050-DATA
STE050GRL	1/2	STE050GR
STE075GRL	3/4	STE075GR
STE100GRL	1	STE100GR
STE125GRL	1-1/4	STE125GR
STE150GRL	1-1/2	STE150GR
STE200GRL	2	STE200GR
STE250GRL	2-1/2	STE250GR
STE300GRL	3	STE300GR
STE350GRL	3-1/2	STE350GR
STE400GRL	4	STE400GR



BondStar® Grounding Locknut only



Cat. No.	Sizes (in.)	Description
L050GRL	1/2	Locknut with Lay-in Lug and Screw
L075GRL	3/4	
L100GRL	1	
L125GRL	1-1/4	
L150GRL	1-1/2	
L250GRL	2-1/2	
L300GRL	3	
L350GRL	3-1/2	
L400GRL	4	
L500GRL	5	
L600GRL	6	



Lay-in Lug



Cat. No.	Screw	For Hub Sizes (in.)
GRL-LUG1032	#10, 32 TPI	1/2, 3/4, 1
GRL-LUG1/4-20	1/4, 20 TPI	1-1/4 - 6