


Russellstoll®

UniGard™ Watertight Pin and Sleeve Devices IP67

60 Amp

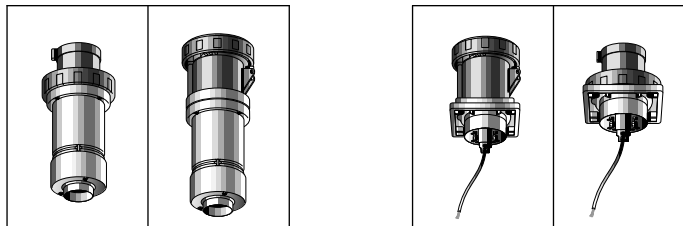

Poles & Wires	Configuration			Voltage/ Colour Coding	Plug	Connector	Cable O.D. Range Inches	Receptacle*	Inlet*	
	Receptacle/ Connector	Plug/ Inlet	Clock Hour							
WATERTIGHT IP67	2P3W			4h	125	RS360P4W	RS360C4W	.937-1.375	RS360R4W	RS360B4W
	2P3W			6h	250	RS360P6W	RS360C6W	.937-1.375	RS360R6W	RS360B6W
	2P3W			5h	277	RS360P5W	RS360C5W	.937-1.375	RS360R5W	RS360B5W
	2P3W			7h	480	RS360P7W	RS360C7W	.937-1.375	RS360R7W	RS360B7W
	2P3W			3h	250DC	RS360P3W	RS360C3W	.937-1.375	RS360R3W	RS360B3W
	3P4W			12h	125/250	RS460P12W	RS460C12W	.937-1.375	RS460R12W	RS460B12W
	3P4W			9h	3Ø250	RS460P9W	RS460C9W	.937-1.375	RS460R9W	RS460B9W
	3P4W			7h	3Ø480	RS460P7W	RS460C7W	.937-1.375	RS460R7W	RS460B7W
	3P4W			5h	3Ø600	RS460P5W	RS460C5W	.937-1.375	RS460R5W	RS460B5W
	4P5W			9h	3ØY120/208	RS560P9W	RS560C9W	.937-1.375	RS560R9W	RS560B9W
	4P5W			7h	3ØY277/480	RS560P7W	RS560C7W	.937-1.375	RS560R7W	RS560B7W
	4P5W			5h	ØY347/600	RS560P5W	RS560C5W	.937-1.375	RS560R5W	RS560B5W

All UniGard 60 & 100 Amp devices ship standard with IEC 309-1 configuration center "pilot" pin/sleeve used for auxiliary contact service. Special construction without these pilots is available.

Liquidtight Conduit Adapter Kit*

6LTK5C10 60A 5W 1" NPT

*Additional sizes available on request.

63 Amp



63 Amp IP67	2P3W			6h	250V	RS363P6W	RS363C6W	.937-1.375	RS363R6W	RS363B6W
	3P4W			6h	380-415V	RS463P6W	RS463C6W	.937-1.375	RS463R6W	RS463B6W
	4P5W			6h	220-240/ 380-415V	RS563P6W	RS563C6W	.937-1.375	RS563R6W	RS563B6W

*See Page 99 for back box/mounting options.

■ Red is for Euro.

■ Blue is for devices supplied in North America. Colour difference does not affect mating.

Colour difference does not affect mating.

Contact your Regional Sales Office for inlet/receptacle mounting components.

UL Listing E2630, E47956
UL Classification E205590

Liquidtight Conduit Adapter Kit*


6LTK5C10 63A 5W 1" NPT

*Additional sizes available on request.

Russellstoll®

UniGard™ Watertight Pin and Sleeve Devices IP67

100 Amp

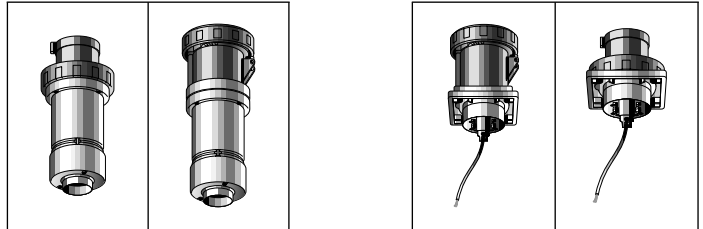

	Poles & Wires	Configuration			Voltage/ Colour Coding	Plug	Connector	Cable O.D. Range Inches	Receptacle*	Inlet*
		Receptacle/ Connector	Plug/ Inlet	Clock Hour						
WATERTIGHT IP67	2P3W**			6h	250	RS3100P6W	RS3100C6W	1.2650-1.790	RS3100R6W	RS3100B6W
	2P3W**			7h	480	RS3100P7W	RS3100C7W	1.2650-1.790	RS3100R7W	RS3100B7W
	3P4W			12h	125/250	RS4100P12W	RS4100C12W	1.2650-1.790	RS4100R12W	RS4100B12W
	3P4W			9h	3Ø250	RS4100P9W	RS4100C9W	1.2650-1.790	RS4100R9W	RS4100B9W
	3P4W			7h	3Ø480	RS4100P7W	RS4100C7W	1.2650-1.790	RS4100R7W	RS4100B7W
	3P4W			5h	3Ø600	RS4100P5W	RS4100C5W	1.2650-1.790	RS4100R5W	RS4100B5W
	4P5W			9h	3ØY120/208	RS5100P9W	RS5100C9W	1.2650-1.790	RS5100R9W	RS5100B9W
	4P5W			7h	3ØY277/480	RS5100P7W	RS5100C7W	1.2650-1.790	RS5100R7W	RS5100B7W
	4P5W			5h	ØY347/600	RS5100P5W	RS5100C5W	1.2650-1.790	RS5100R5W	RS5100B5W

**Alternate vendor supplied item; construction features will vary from specs in this catalogue. Full IEC approval and mating guaranteed.
All UniGard 60 & 100 Amp devices ship standard with IEC 309-1 configuration center "pilot" pin/sleeve used for auxillary contact service.
Special construction without these pilots is available.

UL Listing E2630, E47956
UL Classification E205590

125 Amp



125 Amp IP67	2P3W**			6h	250V	RS3125P6W	RS3125C6W	1.265-1.790	RS3125R6W	RS3125B6W
	3P4W			6h	380-415V	RS4125P6W	RS4125C6W	1.265-1.790	RS4125R6W	RS4125B6W
	4P5W			6h	220-240/ 380-415V	RS5125P6W	RS5125C6W	1.265-1.790	RS5125R6W	RS5125B6W

**See Page 99 for back box/mounting options.

**Alternate vendor supplied item; construction features will vary from specs in this catalogue. Full IEC approval and mating guaranteed.

■ Red is for Euro.

■ Blue is for devices supplied in North America.

Colour difference does not affect mating.

Contact your Regional Sales Office for inlet/receptacle mounting components.

UL Listing E2630, E47956
UL Classification E205590