


Russellstoll®

Cross-Reference Ordering Guide

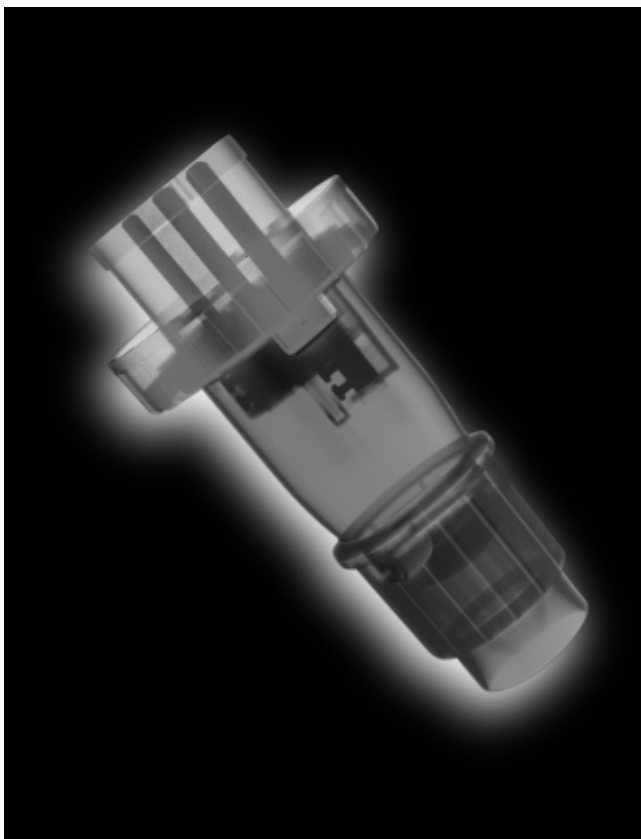

Russellstoll IEC Benefits

Safety

- Fits OTHER competitors, too! IEC 309 standards, UL listed
- Water OK here! (IP67 OR IP44 protection classes)
- You KNOW it's locked and cable TIGHT
- FLAME Rated UL94-V1 (V0 available)
- SOLID sealing protection with gasketed handle and ring cable seal
- Safe Selections: colored specifications for Voltage, Amperage & Poles/Wires...

Performance

- ONE-FOURTH the assembly time with EZ-Lok™ clip system
- Easy, fast cable clamping, all-around strong
- Surface mounts easy and smooth, EVERY time
- Easy Maintenance: one side terminal access; cable gland "one piece screw" clamp
- Fits industry common back boxes


Durability

- Value Tough - Best cost installation
- QuikGrip™ cable clamp for longer service life
- Stainless hardware - won't rust away
- Use your standard tools
- BEST electrical circuits: Pin & Sleeve self-cleaning contacts

RUSSELLSTOLL® UNIGARD™

How to Read the Catalogue Numbering System

RS 430P9W

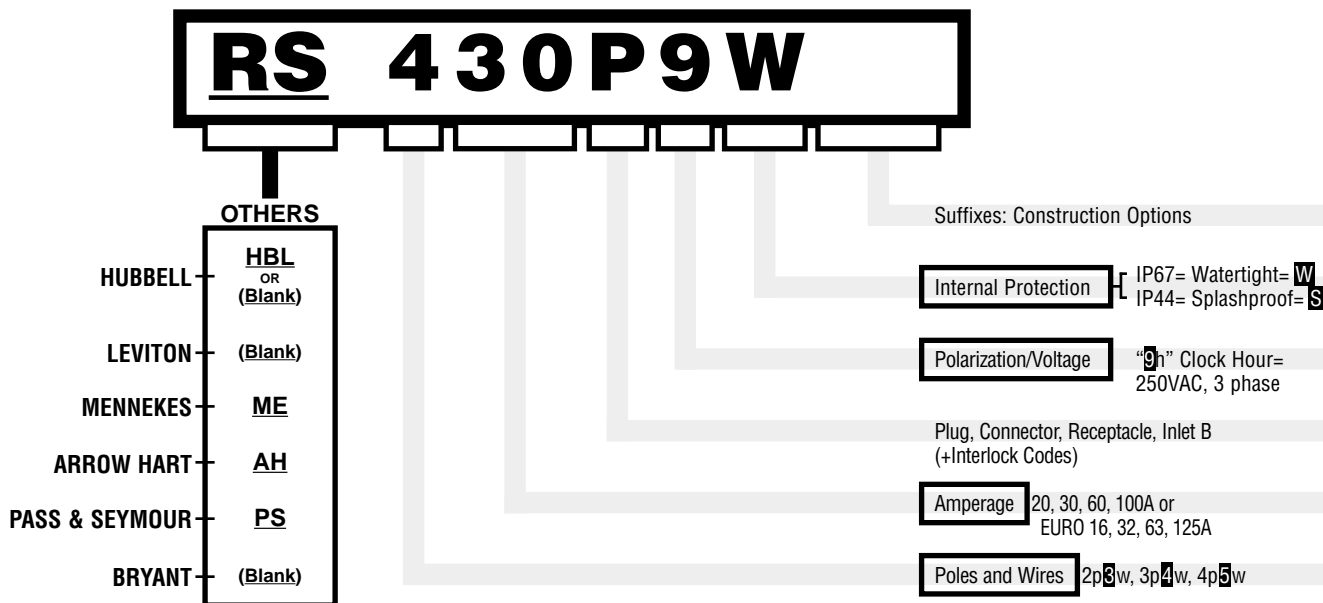

Russellstoll®

Product Cross-Reference

UniGard® Product Comparison

<i>Russellstoll</i>	<i>Arrow-Hart</i>	<i>Hubbell</i>	<i>Leviton</i>	<i>Pass & Seymour</i>	<i>Description of Items</i>					
RS 3 20 B 4 W	AH 3 20 B 4 W	HBL 3 20 B 4 W	3 20 B 4 W	PS 3 20 B 4 W	20A	Inlet	2p3w	4h	120VAC	IP67
RS 3 20 C 4 W	AH 3 20 C 4 W	HBL 3 20 C 4 W	3 20 C 4 W	PS 3 20 C 4 W	20A	Connector	2p3w	4h	120VAV	IP67
RS 3 20 P 4 W	AH 3 20 P 4 W	HBL 3 20 P 4 W	3 20 P 4 W	PS 3 20 P 4 W	20A	Plug	2p3w	4h	120VAC	IP67
RS 3 20 R 4 W	AH 3 20 R 4 W	HBL 3 20 R 4 W	3 20 R 4 W	PS 3 20 R 4 W	20A	Receptacle	2p3w	4h	120VAC	IP67
RS 3 30 C 6 W	AH 3 30 C 6 W	HBL 3 30 C 6 W	3 30 C 6 W	PS 3 30 C 6 W	30A	Connector	2p3w	6h	250VAC	IP67
RS 3 30 P 6 W	AH 3 30 P 6 W	HBL 3 30 P 6 W	3 30 P 6 W	PS 3 30 P 6 W	30A	Plug	2p3w	6h	250VAC	IP67
RS 3 30 R 6 W	AH 3 30 R 6 W	HBL 3 30 R 6 W	3 30 R 6 W	PS 3 30 R 6 W	30A	Receptacle	2p3w	6h	250VAC	IP67
RS 4 60 P 7 W	AH 4 60 P 7 W	HBL 4 60 P 7 W	4 60 P 7 W	PS 4 60 P 7 W	60A	Plug	3p4w	7h	480VAC	IP67
RS 4 60 R 7 W	AH 4 60 R 7 W	HBL 4 60 R 7 W	4 60 R 7 W	PS 4 60 R 7 W	60A	Receptacle	3p4w	7h	480VAC	IP67
RS 4 100 C 7 W	AH 4 100 C 7 W	HBL 4 100 C 7 W	4 100 C 7 W	PS 4 100 C 7 W	100A	Connector	3p4w	7h	480VAC	IP67
RS 4 100 P 7 W	AH 4 100 P 7 W	HBL 4 100 P 7 W	4 100 P 7 W	PS 4 100 P 7 W	100A	Plug	3p4w	7h	480VAC	IP67
RS 4 100 R 7 W	AH 4 100 R 7 W	HBL 4 100 R 7 W	4 100 R 7 W	PS 4 100 R 7 W	100A	Receptacle	3p4w	7h	480VAC	IP67
RS 4 20 B 9 W	AH 4 20 B 9 W	HBL 4 30 B 9 W	4 30 B 9 W	PS 4 30 B 9 W	30A	Inlet	3p4w	9h	250V 3ph	IP67
RS 4 20 C 9 W	AH 4 20 C 9 W	HBL 4 30 C 9 W	4 30 C 9 W	PS 4 30 C 9 W	30A	Connector	3p4w	9h	250V 3ph	IP67
RS 4 30 P 9 W	AH 4 30 P 9 W	HBL 4 30 P 9 W	4 30 P 9 W	PS 4 30 P 9 W	30A	Plug	3p4w	9h	250V 3ph	IP67
RS 4 30 R 9 W	AH 4 30 R 9 W	HBL 4 30 R 9 W	4 30 R 9 W	PS 4 30 R 9 W	30A	Receptacle	3p4w	9h	250V 3ph	IP67
RS 4 60 C 9 W	AH 4 60 C 9 W	HBL 4 60 C 9 W	4 60 C 9 W	PS 4 60 C 9 W	60A	Connector	3p4w	9h	250V 3ph	IP67
RS 4 60 P 9 W	AH 4 60 P 9 W	HBL 4 60 P 9 W	4 60 P 9 W	PS 4 60 P 9 W	60A	Plug	3p4w	9h	250V 3ph	IP67
RS 4 60 R 9 W	AH 4 60 R 9 W	HBL 4 60 R 9 W	4 60 R 9 W	PS 4 60 R 9 W	60A	Receptacle	3p4w	9h	250V 3ph	IP67
RS 4 100 B 9 W	AH 4 100 B 9 W	HBL 4 100 B 9 W	4 100 B 9 W	PS 4 100 B 9 W	100A	Inlet	3p4w	9h	250V 3ph	IP67
RS 4 100 C 9 W	AH 4 100 C 9 W	HBL 4 100 C 9 W	4 100 C 9 W	PS 4 100 C 9 W	100A	Connector	3p4w	9h	250V 3ph	IP67
RS 4 100 P 9 W	AH 4 100 P 9 W	HBL 4 100 P 9 W	4 100 P 9 W	PS 4 100 P 9 W	100A	Plug	3p4w	9h	250V 3ph	IP67
RS 4 100 R 9 W	AH 4 100 R 9 W	HBL 4 100 R 9 W	4 100 R 9 W	PS 4 100 R 9 W	100A	Receptacle	3p4w	9h	250V 3ph	IP67
RS 4 20 B 12 W	AH 4 20 B 12 W	HBL 4 20 B 12 W	4 20 B 12 W	PS 4 20 B 12 W	20A	Inlet	3p4w	12h	125/250V	IP67
RS 4 20 C 12 W	AH 4 20 C 12 W	HBL 4 20 C 12 W	4 20 C 12 W	PS 4 20 C 12 W	20A	Connector	3p4w	12h	125/250V	IP67
RS 4 20 P 12 W	AH 4 20 P 12 W	HBL 4 20 P 12 W	4 20 P 12 W	PS 4 20 P 12 W	20A	Plug	3p4w	12h	125/250V	IP67
RS 4 20 R 12 W	AH 4 20 R 12 W	HBL 4 20 R 12 W	4 20 R 12 W	PS 4 20 R 12 W	20A	Receptacle	3p4w	12h	125/250V	IP67
RS 4 60 C 12 W	AH 4 60 C 12 W	HBL 4 60 C 12 W	4 60 C 12 W	PS 4 60 C 12 W	60A	Connector	3p4w	12h	125/250V	IP67
RS 4 60 P 12 W	AH 4 60 P 12 W	HBL 4 60 P 12 W	4 60 P 12 W	PS 4 60 P 12 W	60A	Plug	3p4w	12h	125/250V	IP67
RS 4 60 R 12 W	AH 4 60 R 12 W	HBL 4 60 R 12 W	4 60 R 12 W	PS 4 60 R 12 W	60A	Receptacle	3p4w	12h	125/250V	IP67
RS 4 100 C 12 W	AH 4 100 C 12 W	HBL 4 100 C 12 W	4 100 C 12 W	PS 4 100 C 12 W	100A	Connector	3p4w	12h	125/250V	IP67
RS 4 100 P 12 W	AH 4 100 P 12 W	HBL 4 100 P 12 W	4 100 P 12 W	PS 4 100 P 12 W	100A	Plug	3p4w	12h	125/250V	IP67
RS 4 100 R 12 W	AH 4 100 R 12 W	HBL 4 100 R 12 W	4 100 R 12 W	PS 4 100 R 12 W	100A	Receptacle	3p4w	12h	125/250V	IP67
RS 5 60 C 7 W	AH 5 60 C 7 W	HBL 5 60 C 7 W	5 60 C 7 W	PS 5 60 C 7 W	60A	Connector	4p5w	7h	277/480 3ph.	IP67
RS 5 60 P 7 W	AH 5 60 P 7 W	HBL 5 60 P 7 W	5 60 P 7 W	PS 5 60 P 7 W	60A	Plug	4p5w	7h	277/480 3ph.	IP67
RS 5 60 R 7 W	AH 5 60 R 7 W	HBL 5 60 R 7 W	5 60 R 7 W	PS 5 60 R 7 W	60A	Receptacle	4p5w	7h	277/480 3ph.	IP67
RS 5 30 C 9 W	AH 5 30 C 9 W	HBL 5 30 C 9 W	5 30 C 9 W	PS 5 30 C 9 W	30A	Connector	4p5w	9h	250V 3ph +N	IP67
RS 5 30 P 9 W	AH 5 30 P 9 W	HBL 5 30 P 9 W	5 30 P 9 W	PS 5 30 P 9 W	30A	Plug	4p5w	9h	250V 3ph +N	IP67
RS 5 30 R 9 W	AH 5 30 R 9 W	HBL 5 30 R 9 W	5 30 R 9 W	PS 5 30 R 9 W	30A	Receptacle	4p5w	9h	250V 3ph +N	IP67
RS 5 60 B 9 W	AH 5 60 B 9 W	HBL 5 60 B 9 W	5 60 B 9 W	PS 5 60 B 9 W	60A	Inlet	4p5w	9h	250V 3ph +N	IP67
RS 5 60 C 9 W	AH 5 60 C 9 W	HBL 5 60 C 9 W	5 60 C 9 W	PS 5 60 C 9 W	60A	Connector	4p5w	9h	250V 3ph +N	IP67
RS 5 60 P 9 W	AH 5 60 P 9 W	HBL 5 60 P 9 W	5 60 P 9 W	PS 5 60 P 9 W	60A	Plug	4p5w	9h	250V 3ph +N	IP67
RS 5 60 R 9 W	AH 5 60 R 9 W	HBL 5 60 R 9 W	5 60 R 9 W	PS 5 60 R 9 W	60A	Receptacle	4p5w	9h	250V 3ph +N	IP67
RS 5 100 C 9 W	AH 5 100 C 9 W	HBL 5 100 C 9 W	5 100 C 9 W	PS 5 100 C 9 W	100A	Connector	4p5w	9h	250V 3ph +N	IP67
RS 5 100 P 9 W	AH 5 100 P 9 W	HBL 5 100 P 9 W	5 100 P 9 W	PS 5 100 P 9 W	100A	Plug	4p5w	9h	250V 3ph +N	IP67
RS 5 100 R 9 W	AH 5 100 R 9 W	HBL 5 100 R 9 W	5 100 R 9 W	PS 5 100 R 9 W	100A	Receptacle	4p5w	9h	250V 3ph +N	IP67

* HBL prefix is only used for ordering; parts do not display prefix.
 European Ratings (16,32,63,125A) employ 5 digit numeric-only Cat. No., eg. 12345