



**N**

new product

## LBL Series

Vandal resistant self-powered linear battery unit




### FEATURES

- High impact thermoplastic housing
- Meets IK10 impact rating requirements<sup>1</sup>
- Standard surface ceiling and wall mount
- Optional accessory: semi-recessed ceiling mount
- Easily adjustable LED strips for multiple beam angles
- 1200-1300 lumen output
- Dual-mode: normal lighting (field selectable) and emergency lighting
- Self-test and self-diagnostic
- Lithium-ion phosphate battery offering 120 minutes of emergency lighting
- Battery over/under charge protection
- Universal voltage 120V through 347V 60Hz
- Rated for 5°C to 45°C
- Suitable for wet locations
- Meets IP65 rating
- ROHS compliant
- cUL approved to CSA C22.2 No, 141-15
- **See warranty details at: [www.lumacell.ca](http://www.lumacell.ca)**

<sup>1</sup>IK ratings refer to impact tests. IK10= Protected against 20 joules of impact (equivalent to 5KG of mass dropped from 40cm high)


### DIMENSIONS

Dimensions are approximate and subject to change.

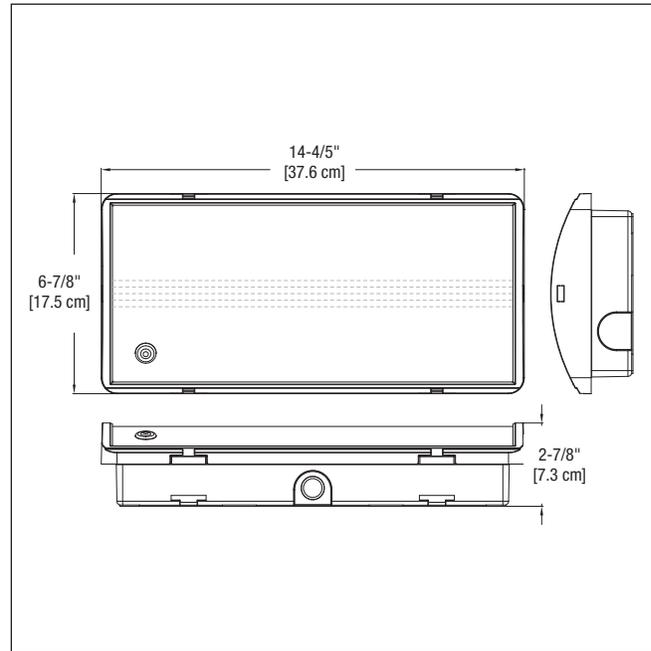

### SPACING

MOUNTING TYPE	SPACING AT 9FT MOUNTING	LUMENS
Ceiling mount	62'	1300
Wall mount	53'	1200

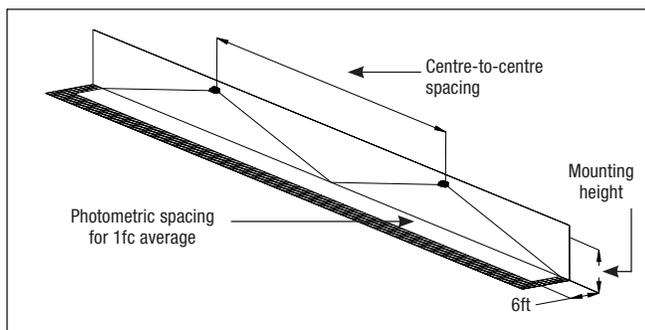

### POWER CONSUMPTION

STATUS	VOLTAGE	WATTAGE
Normal lighting	120-347 volt	16 watts
Emergency lighting		14 watts

### ACCESSORIES (order as a separate item)

DESCRIPTION	ORDERING CODE
Semi recessed mounting bracket	KIT-SR-L

### ORDERING INFORMATION

SERIES	
<b>LBL</b> = linear battery unit	<b>EM</b> = dual-mode: normal lighting and/or emergency lighting

EXAMPLE: LBL-EM