


DIMENSIONS

Dimensions are approximate and subject to change.

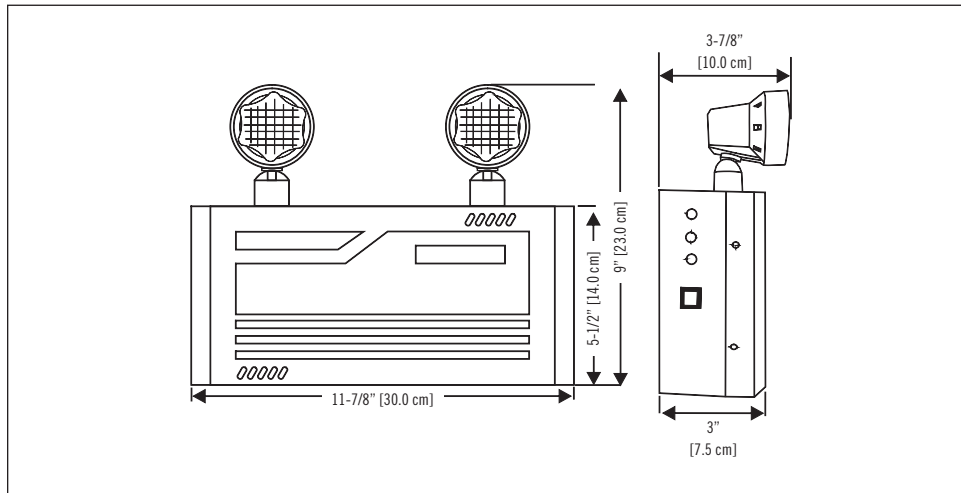

CM-SB SERIES

Steel battery unit

FEATURES

- Steel housing with lightweight thermoplastic fully adjustable 2W, long life LED heads
- Suitable for wall mount application
- Fully adjustable LED glare-free lens
- Can power CM-R1 and CM-R2 remote fixtures only
- Standard 120/347VAC input with line cord kit
- Lead-acid battery
- Up to 120 minutes of emergency lighting
- Red LED charger monitor
- Momentary test switch allows for quick operational check
- CSA C22.2 No.141-15 certified

See warranty details at: www.tnb.ca/en/brands/ready-lite

POWER CONSUMPTION AND UNIT RATING

MODEL	AC SPECS			
		WATTAGE	CURRENT	EFFICIENCY
CM-SB-RL	120V, 50/60Hz	3.2W	0.03A	0.97PF
	277V, 50/60Hz	3.4W	0.014A	0.92PF
	347V, 50/60Hz	3.6W	0.01A	0.92PF

ORDERING INFORMATION

SERIES	VOLTAGE
CM-SB-RL= 27W	Blank= 120VAC-347VAC

EXAMPLE: CM-SB-RL