

Iberville FS and FD products



CIFDC-1/2



CIFST



CFSH-G



2CDR

Applications

- FS boxes are CSA approved
- FS device boxes are installed in applications that require a rugged unit to accept wiring devices, switches, electronic components and terminal blocks
- FS device boxes provide spacious accessible wiring chambers that are a convenient location to maintain or change a system; pull conductors; make splices or branch conduits
- Some FS device boxes, when used with an appropriate cover, provide a raintight installation
- Both weatherproof and dry location covers are available

Features/benefits

- FS device boxes are sand casted or die casted using copper free (less than 0.004% copper content) aluminum alloys.
- FS device boxes incorporate external hub design that provides maximum wiring capacity
- FS device boxes have precision threaded hubs allowing trouble-free field installation of rigid conduit
- FS device boxes are available in 1½ in. and 2½ in. depth
- Carlon nonmetallic weatherproof FS covers are UV-resistant, flame retardant and non-corrosive

Standard materials

- CIFS and CIFD device boxes: Sand-cast, copper-free aluminum (less than 0.004% copper content)
- CIFSU: Die-cast, copper-free aluminum (less than 0.004% copper content)
- FS covers: Die-cast aluminum, sand-cast aluminum or nonmetallic

Compliances




Compliances as noted on each page of the catalogue include:

- CSA certified
- UL listed

Iberville FS and FD products



FS boxes – 1 7/8 in. deep (cast aluminum)



	Cat. no.	Hub size (in.)	No. of gangs	No. of lugs	Std. ctn.
	CIFS-1G-1/2	1 x 1/2	1	3	20
	CIFS-1G-3/4	1 x 3/4	1	3	20
	CIFS-1G-1	1 x 1	1	3	20
	CIFS-2G-1/2	1 x 1/2	2	3	20
	CIFS-2G-3/4	1 x 3/4	2	3	20
	CIFS-2G-1	1 x 1	2	3	20
	CIFS-3G-1/2	1 x 1/2	3	3	10
	CIFS-3G-3/4	1 x 3/4	3	3	10


FSC boxes – 1 7/8 in. deep (cast aluminum)



	Cat. no.	Hub size (in.)	No. of gangs	No. of lugs	Std. ctn.
	CIFSC-1G-1/2	2 x 1/2	1	4	10
	CIFSC-1G-3/4	2 x 3/4	1	4	10
	CIFSC-1G-1	2 x 1	1	4	10
	CIFSC-2G-1/2	2 x 1/2	2	4	10
	CIFSC-2G-3/4	2 x 3/4	2	4	10
	CIFSC-2G-1	2 x 1	2	4	10
	CIFSC-3G-3/4	2 x 3/4	3	4	10


FSCC boxes – 1 7/8 in. deep (cast aluminum)





	Cat. no.	Hub size (in.)	No. of gangs	No. of lugs	Std. ctn.
	CIFSCC-1G-1/2	3 x 1/2	1	3	10
	CIFSCC-1G-3/4	3 x 3/4	1	3	10


Iberville FS and FD products


— **FDC boxes – 2½ in. deep (cast aluminum)** 

	Cat. no.	Hub size (in.)	No. of gangs	No. of lugs	Std. ctn.
	CIFDC-1/2	2 x ½	1	2	10
	CIFDC-3/4	2 x ¾	1	2	5
	CIFDC-1	2 x 1	1	2	5


— **FST box – 3½ in. deep (cast aluminum)** 

	Cat. no.	Hub size (in.)	No. of gangs	No. of lugs	Std. ctn.
	CIFST (2 faces)	2	–	–	10

— **FSF box – 3 in. deep (cast aluminum)** 

	Cat. no.	Hub size (in.)	No. of gangs	No. of lugs	Std. ctn.
	CIFSF (1 face)	2	–	–	10

— **Mounting lugs for CIFSU** 

	Cat. no.	Description	Std. ctn.
	FG-09080	Mounting lugs for a 3-hole universal FSU box. 2¾ inches deep.	10


Iberville FS and FD products

FS boxes – 1 1/8 in. deep (cast aluminum)



Cat. no.	Hub size	A	B	C	D	E	F	G	H	CI
CIFS-1G-1/2	1 x 1/2	4 5/16	2 13/16	1 3/16	1 7/8	1 1/4	2 7/8	2 5/16	1 5/16	14.0
CIFS-1G-3/4	1 x 3/4	4 5/16	2 13/16	1 3/16	1 7/8	1 1/2	2 7/8	2 5/16	1 5/16	14.0
CIFS-1G-1	1 x 1	4 5/16	2 13/16	1 3/16	1 7/8	1 3/4	2 7/8	2 5/16	1 5/16	14.0
CIFS-2G-1/2	1 x 1/2	4 3/8	4 11/16	7/8	1 7/8	1 1/4	2 7/8	4 1/4	1 5/8	26.0
CIFS-2G-3/4	1 x 3/4	4 3/8	4 11/16	7/8	1 7/8	1 9/16	2 7/8	4 1/4	1 5/8	26.0
CIFS-2G-1	1 x 1	4 3/8	4 11/16	7/8	1 7/8	1 3/4	2 7/8	4 1/4	1 5/8	26.0
CIFS-3G-1/2	1 x 1/2	4 3/8	6 1/2	7/8	1 7/8	1 1/4	2 7/8	6 1/16	1 5/8	41.0
CIFS-3G-3/4	1 x 3/4	4 3/8	6 1/2	7/8	1 7/8	1 9/16	2 7/8	6 1/16	1 5/8	41.0

Diagrams

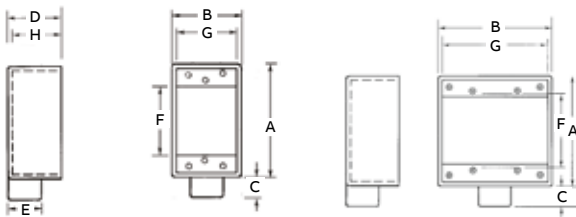

CIFS-1G


CIFS-2G

FSC boxes – 1 1/8 in. deep (cast aluminum)



Cat. no.	Hub size	A	B	C	D	E	F	G	H	CI
CIFSC-1G-1/2	2 x 1/2	4 5/16	2 13/16	2 7/32	1 7/8	1 1/4	2 7/8	2 5/16	1 5/16	14.0
CIFSC-1G-3/4	2 x 3/4	4 5/16	2 13/16	2 7/32	1 7/8	1 1/2	2 7/8	2 5/16	1 5/16	14.0
CIFSC-1G-1	2 x 1	4 5/16	2 13/16	2 7/32	1 7/8	1 3/4	2 7/8	2 5/16	1 5/16	14.0
CIFSC-2G-1/2	2 x 1/2	4 3/8	4 11/16	3 1/32	1 7/8	1 1/4	2 7/8	4 1/4	1 5/8	26.0
CIFSC-2G-3/4	2 x 3/4	4 3/8	4 11/16	3 1/32	1 7/8	1 9/16	2 7/8	4 1/4	1 5/8	26.0
CIFSC-2G-1	2 x 1	4 3/8	4 11/16	3 1/32	1 7/8	1 3/4	2 7/8	4 1/4	1 5/8	26.0
CIFSC-3G-3/4	2 x 3/4	4 3/8	6 1/2	2 9/32	1 7/8	1 9/16	2 7/8	6 1/8	1 5/8	41.0

Diagrams

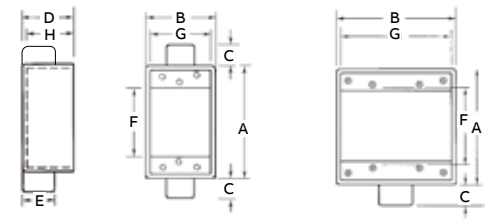

CIFSC-1G


CIFSC-3G-3/4

FSCC boxes – 1 1/8 in. deep (cast aluminum)




Cat. no.	Hub size	A	B	C	D	E	F	G	H	J	CI
CIFSCC-1G-1/2	3 x 1/2	4 5/16	2 13/16	2 7/32	1 7/8	1 1/4	2 7/8	2 5/16	1 5/16	1 1/16	14.0
CIFSCC-1G-3/4	3 x 3/4	4 5/16	2 13/16	2 7/32	1 7/8	1 1/2	2 7/8	2 5/16	1 5/16	1 3/4	14.0

Diagrams




CIFSCC-1G

Iberville FS and FD products


FDC boxes – 2½ in. deep (cast aluminum) 

Cat. no.	Hub size	A	B	C	D	E	F	G	H	CI
CIFDC-1/2	2 x ½	4 5/16	2 13/16	1 5/16	2 5/8	1 3/8	2 7/8	2 3/8	2 5/32	22.5
CIFDC-3/4	2 x ¾	4 5/16	2 13/16	1 5/16	2 5/8	1 3/8	2 7/8	2 3/8	2 13/32	22.5
CIFDC-1	2 x 1	4 5/16	2 13/16	1 3/8	2 5/8	1 3/8	2 7/8	2 3/8	2 13/32	22.5

Diagrams




CIFDC-1/2


FSF box – 3 in. deep (cast aluminum) 

Cat. no.	Hub size	A	B	C	D	E	F	G	H	J	CI
CIFSF	2	4 5/16	2 ¾	3 1/2	2 7/8	2 7/8	2 13/16	2 13/16	1 15/32	-	30.5

Diagram




CIFSF (1 face)

FST box – 3½ in. deep (cast aluminum) 

Cat. no.	Hub size	A	B	C	D	E	F	G	H	J	CI
CIFST	2	4 5/16	2 ¾	1 ¾	3 3/8	3	2 7/8	2 5/16	2 13/16	-	38.7

Diagram



CIFST (2 faces)

Iberville FS and FD products

Single-gang blank covers (cast aluminum)



Cat. no.	Description	Std. ctn.
CIFS-100G	Blank – box mount (gasket glued on cover)	25



Single-gang switch covers (cast aluminum)



Cat. no.	Description	Std. ctn.
CFSTF	One lever switch – box mount	25




Single-gang switch covers (cast aluminum)



Cat. no.	A	B	F	G
CFSTF	$4\frac{3}{16}$	$2\frac{13}{16}$	$3\frac{1}{4}$	$1\frac{7}{8}$

Diagram



CFSTF