

## LDX-EXP-P LED SERIES

Battery Units, Self-Powered Pictogram Exit Signs & Combination Units

## CSA CERTIFIED FOR USE IN HAZARDOUS LOCATIONS

The LDX-EXP-P LED Series of battery equipment is designed to cover emergency lighting applications for the entire spectrum of hazardous locations, where inflammable gases, vapors, liquids, dust particles or fabrics tissues are permanently present or are likely to exist.

The LDX-EXP-P LED Series combines in one simple-to-order catalogue family three traditional emergency lighting products with battery back-up: battery units with emergency lights, Self-Powered Pictogram Signs, and combination units with emergency lights and Pictogram Sign. The equipment is also available with additional emergency power capacity to drive remote heads and Pictogram Signs.

#### **FEATURES**

- CSA Certified for use in hazardous locations:
  - Class I, Division 1, Groups, C, D
  - Class II, Divisions 1 and 2, Groups E, F, G
  - Class III
- For wall mount only
- Die-cast aluminum body with grey epoxy powder coat finish; clear, impact and heat resistant prismatic glass globe
- Long-life, maintenance-free Lead-Calcium battery
- Battery charger is current limited, temperature compensated, short-circuit proof and reverse polarity protected
- Emergency heads with one or twin lamp design
- Large Self-Powered combo includes a transfer circuit to drive an additional three (3) remote pictogram exit signs (total power max 15W)
- T6 maximum 85°C (185°F) temperature code
- Meets or exceeds CSA C22.2 No.141-10 & No. 137

See warranty details at: www.tnb.ca/en/brands/ready-lite





#### TYPICAL SPECIFICATIONS

$Supply and install the \textbf{Ready-Lite} \textbf{\tiny LDX-EXP-P LED Series} of hazardous location battery equipment. The battery expression of the location battery equipment is a supply and install the \textbf{\tiny Ready-Lite} \textbf{\tiny LDX-EXP-P LED Series} of hazardous location battery equipment. The battery expression is a supply and install the \textbf{\tiny Ready-Lite} \textbf{\tiny LDX-EXP-P LED Series} of hazardous location battery equipment. The battery expression is a supply and install the \textbf{\tiny Ready-Lite} \textbf{\tiny LDX-EXP-P LED Series} of hazardous location battery equipment. The battery expression is a supply and install the \textbf{\tiny Ready-Lite} \textbf{\tiny LDX-EXP-P LED Series} of hazardous location battery equipment. The battery expression is a supply and the location battery expression battery expression between the location battery exp$
unit housing will be constructed of die cast aluminum with grey epoxy powder coat finish and equipped with heavy-duty key holes for wall mount. The equipment shall be rated for 120, 277 or 347V, 60 Hz input and be
CSA listed. The equipment shall have an output of V and W and shall supply the
rated load for a minimum of a 1/2 hour to 87,5% of the rated battery voltage. The battery shall be a long-life, maintenance-free lead-calcium type. The charger shall be fully computer tested and have its charge voltage
set in the factory to $\pm$ 1% tolerance. The charger shall be current limited, temperature compensated, short circuit proof and reverse polarity protected. The charger shall be furnished with an electronic lockout circuit, which will connect the battery when the AC circuit is activated, and an electronic brownout circuit.
Where required the equipment shall come complete with heads, each of them equipped with lamp(s) of W.
The head housing shall be die-cast aluminum with grey epoxy powder coat finish. The lenses shall be a clear, impact and heat resistant prismatic glass globe. The head shall be factory sealed, with no need for externa seals.
Where required the equipment shall come complete with one Pictogram Exit Sign and will include a transfer circuit to maintain the Pictogram Sign permanently lighting in both normal and emergency operation. The picto housing shall be industrial grade 14-gauge steel and finished in grey enamel. The faceplate will be constructed of heavy-duty 14-gauge steel.
The equipment shall be certified CSA C22.2 No.137-M1981 for Hazardous Locations:
Class, Division, Group with the temperature code
The Pictogram Exit Sign shall be CSA C22.2 No.141-10 certified.
The equipment shall be <b>Ready-Lite®</b> Model:

#### POWER CONSUMPTION AND UNIT RATING

UNIT CAPACITY	INPUT VOLTAGE	INPUT RATING	WATTAGE CAPACITY				
	INFUI VULIAUE	INFUI NATING	30MIN	1 H	1.5 H	2 H	4 H
	120V, 60Hz 0.45A, 37W						
12V-120W	277V, 60Hz	0.209A, 42W	120	60	40	30	15
	347V, 60 Hz	0.176A, 42W	]				
	120V, 60Hz	0.465A, 38W					
24V-144W	277V, 60Hz	0.208A, 42W	144	72	50	40	20
	347V. 60 Hz	0.178A. 42W					

#### TEMPERATURE CODES: MEASURED AT 40°C AMBIENT

Explosion-proof equipment is composed of one or more modules, each of them qualified for a specific temperature code. The temperature code of the complete equipment (enclosure + picto sign + emergency heads) is defined as the most severe of the temperature codes identified for each of the models.










#### **DIMENSIONS**

Dimensions are approximate and subject to change.

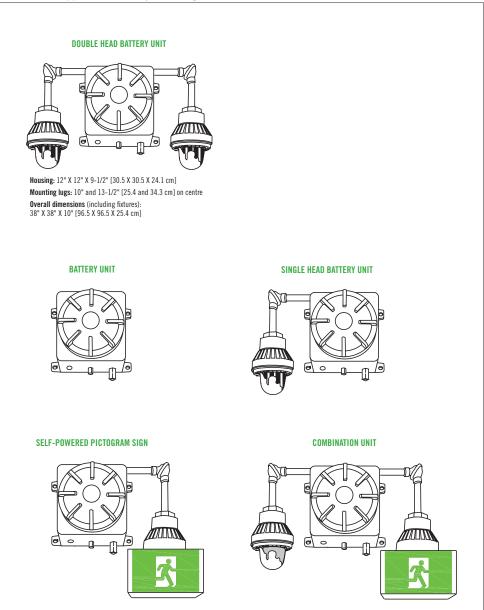

# LDX-EXP-P LED SERIES

### **ORDERING CHART**

DC Voltag	CAPACITY	SERIES	LIGHTING HEAD STYLE	SEVERITY CODE	LAMP TYPE, VOLTAGE AND POWER	SIGN/FACE	AC VOLTAGE	OPTIONS		
LDX24= 24		X= hazardous location	11= single remote, 1 lamp 12= single remote, 2 lamps 21= double remote, 1 lamp each <sup>1</sup> Blank= no heads	Blank=   Cl.1, Div. 1 & 2, Gr. C, D   Cl.11, Div. 1 & 2, Gr. E, F, G,   Cl.111   S2= Cl.1, Div.1, Gr. C, D	Blank= no lamp LD7= 12V-4W MR16 LED LD9= 12V-5W MR16 LED LD10= 12V-6W MR16 LED LD13= 24V-4W MR16 LED	Blank= no sign P1= single face LED pictogram P2= double face LED pictogram	Blank= 120VAC U277= 277VAC input U347= 347VAC input	Blank= no options D3= time delay (15 minutes) D4= arrow down 45° D9= arrow down TP= transfer panel <sup>1,2</sup> U4= arrow up 45° U9= arrow up <sup>1</sup> Standard with combo. <sup>2</sup> Not available for P1 and P2.		

EXAMPLE: LDX12120X11LD7