


## Ocal PVC-coated steel strut

Rugged steel channels protected by corrosion-resistant PVC


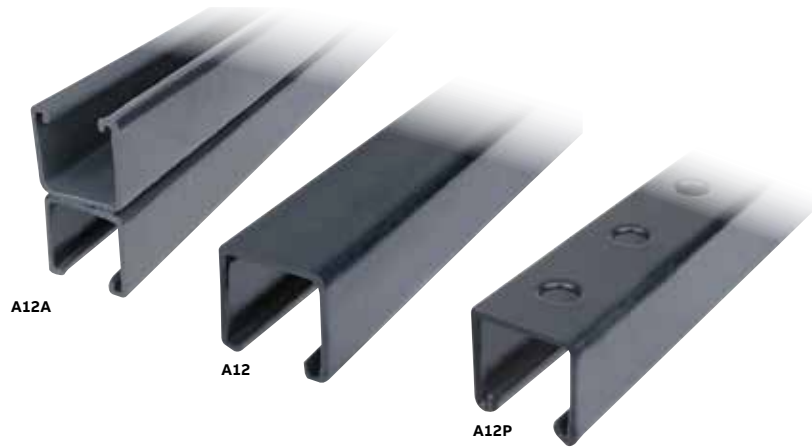


### Product features

- Electro-galvanized zinc plated
- Nominal .007 - .015" (7 - 15 mil) PVC coating
- PVC coating available in your choice of blue, white or gray standard colors
- Custom colors also available on request
- Sold in 10-ft. (3.048m) lengths with standard length tolerance of  $\pm 1/8"$  (3.18mm)
- Choose between standard  $1\frac{5}{8}"$  (41.28mm) and shallow  $1\frac{3}{16}"$  (20.64mm) depths
- Available in both solid and punched styles
- Not recommended for vertical applications

### Ocal PVC-coated steel strut

Product Code	Style	Steel Thickness		Width x Height	
		Gauge	(mm)	(in.)	(mm)
A12- <u>  </u>	Standard	12	2.65	1.63 x 1.63	41.28 x 41.28
A12A- <u>  </u>	Back to Back	12	2.65	1.63 x 3.25	41.28 x 82.55
A12P- <u>  </u>	Standard Punched	12	2.65	1.63 x 1.63	41.28 x 41.28
C14- <u>  </u>	Shallow	14	1.89	1.63 x .81	41.28 x 20.64
C14P- <u>  </u>	Shallow Punched	14	1.89	1.63 x .81	41.28 x 20.64

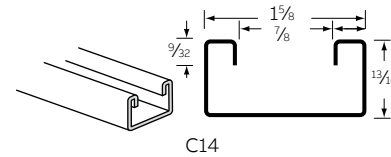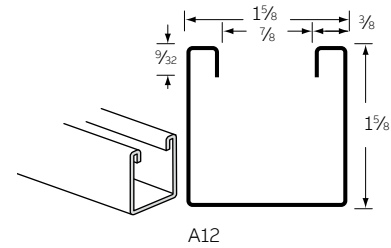

### Cat. No.                      Colour

## A12-

   = space for color identifier

G = Gray

W = White

B = Blue

Custom colors also available.

## All-thread rod

Continuously threaded rod for use with conduit hangers and strut to suspend overhead conduit runs



### Product features

- All-thread steel rod coated with Nominal .007 - .015" (7 - 15 mil) PVC in blue, white or gray with custom colors available on request
- Available in 1/4", 3/8" or 1/2" standard diameters and in 3-, 6- or 10-ft. standard lengths
- Also available uncoated in Type 304 or Type 316 stainless steel
- Stainless steel all-thread rod comes in 3/8" or 1/2" diameters in 6-ft. standard lengths with other diameters and lengths available on request

### Ocal PVC-coated steel all-thread rod

Cat. No.	Trade Size		Length	
	(in.)	(mm)	(ft.)	(mm)
THR1/4X10- <u>  </u>	1/4	6.35	10.00	3.05
THR3/8X3- <u>  </u>	3/8	9.53	3.00	0.91
THR3/8X6- <u>  </u>	3/8	9.53	6.00	1.83
THR3/8X10- <u>  </u>	3/8	9.53	10.00	3.05
THR1/2X3- <u>  </u>	1/2	12.70	3.00	0.91
THR1/2X6- <u>  </u>	1/2	12.70	6.00	1.83
THR1/2X10- <u>  </u>	1/2	12.70	10.00	3.05

### Stainless steel all-thread rod

Type 304 Stainless Cat. No.	Type 316 Stainless Cat. No.	Trade Size		Length	
		(in.)	(mm)	(ft.)	(mm)
H104-3/8X6SS	H104 3/8X6SS316	3/8	9.53	6.00	1.83
H104 3/8X12SS	H104-3/8X12SS6	3/8	9.53	12.00	3.66
H104-1/2X6SSC	H104-1/2X6SS6	1/2	12.70	6.00	1.83
H104 1/2X12SS	H104 1/2X12SS316	1/2	12.70	12.00	3.66

Cat. No.	Diameter x Length	Colour
<b>THR</b>	<b>3/8 x 3-</b>	<u>  </u>

   = space for color identifier

G = Gray 


W = White 

B = Blue 

Custom colors also available.

## Ocal PVC-coated hanger rod beam clamps

Corrosion-protected clamps for hanging threaded rod



500-G  
Hanger Rod Beam Clamp

### Product features

- Malleable iron construction
- Nominal .007 - .015" (7 - 15 mil) PVC coating in blue, white, gray or custom colors
- 500, 502 and 503 also available uncoated in Type 316 stainless steel; add -SS316 to catalog number to order (for example: 502-SS316)




### Ocal PVC-coated hanger rod beam clamps

Cat. No.	Base "A"		Base "B"		Jaw Opening		Tapped Hole		Load Rating <sup>†</sup>	
	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(in.)	(mm)	(lbs)	(kg)
500- <u>  </u>	1	25.40	1 <sup>1</sup> / <sub>4</sub>	31.75	1 <sup>5</sup> / <sub>16</sub>	23.81	1 <sup>1</sup> / <sub>4</sub> -20	6.35 - 20	450	204.12
501- <u>  </u>	1 <sup>1</sup> / <sub>2</sub>	38.10	1 <sup>5</sup> / <sub>8</sub>	41.28	7/ <sub>8</sub>	22.23	1 <sup>5</sup> / <sub>16</sub> -18	7.94 - 18	800	362.87
502- <u>  </u>	2	50.80	2	50.80	1	25.40	3/ <sub>8</sub> -16	9.53 - 16	1300	589.67
503- <u>  </u>	2 <sup>5</sup> / <sub>8</sub>	66.68	2 <sup>1</sup> / <sub>2</sub>	63.50	1	25.40	1/ <sub>2</sub> -13	12.70 - 13	1300	589.67
508- <u>  </u>	2 <sup>1</sup> / <sub>2</sub>	63.50	2 <sup>3</sup> / <sub>8</sub>	60.33	2 <sup>1</sup> / <sub>8</sub>	53.98	1/ <sub>2</sub> -13	12.70 - 13	1700	771.11

\* Metric size designator (ANSI C80.1-1994).

<sup>†</sup> Load ratings based on bottom hole of beam clamp with safety factor of three.

CSA File No. LR-52208

Cat. No.	Colour
<b>500-</b> <u>  </u>	
<u>  </u>	= space for color identifier
<b>G</b> = Gray	
<b>W</b> = White	
<b>B</b> = Blue	
Custom colors also available.	

## Ocal PVC-coated mini conduit hangers

Includes stainless steel bolt and nut for fast, easy installation



MINE3/4-G  
Mini Conduit Hanger

### Product features

- Nominal .007 - .015" (7 - 15 mil) PVC coating in blue, white, gray or custom colors
- Rated for loads of up to 500 lbs (226.80kg) with a safety factor of three

### Ocal PVC-coated mini conduit hangers

Cat. No.	Pipe Size (in.)	Metric Size Designator*
MINE1/2- <u>  </u>	1/2	16
MINE3/4- <u>  </u>	3/4	21
MINE1- <u>  </u>	1	27
MINE1-1/4- <u>  </u>	1 1/4	35
MINE1-1/2- <u>  </u>	1 1/2	41

\* Metric size designator (ANSI C80.1-1994).

Cat. No.	Pipe Size (in.)	Metric Size Designator*
MINE2- <u>  </u>	2	53
MINE2-1/2- <u>  </u>	2 1/2	63
MINE3- <u>  </u>	3	78
MINE3-1/2- <u>  </u>	3 1/2	91
MINE4- <u>  </u>	4	103

Cat. No.	Colour
----------	--------

### MINE1-

   = space for color identifier

G = Gray 

W = White 

B = Blue 

Custom colors also available.

## Pipe straps for strut

Designed for easy attachment of conduit to strut



PVC-coated pipe strap

Just twist-insert these pipe straps anywhere you need them along the slot side of a channel. For additional flexibility, you can position the straps as closely as your pipe couplings permit.




### Product features

- Combination slot and hex head bolt for flexibility of attachment
- Captivated square nut on shoulder enable easy one-handed tightening
- Use with either 1<sup>5</sup>/<sub>8</sub>" or 1<sup>1</sup>/<sub>2</sub>" strut for greater versatility
- Shipped pre-assembled for easier counting, sorting and handling
- Available with nominal .007 - .015" (7 - 15 mil) PVC coating in your choice of blue, white or gray standard colors (custom colors also available on request)

### Ocal PVC-coated strut pipe straps

Ocal PVC-Coated Strut Pipe Straps	Pipe Size (in.)	Metric Size Designator*
SS1/2- <u>  </u>	1/2	16
SS3/4- <u>  </u>	3/4	21
SS1- <u>  </u>	1	27
SS1-1/4- <u>  </u>	1 1/4	35
SS1-1/2- <u>  </u>	1 1/2	41
SS2- <u>  </u>	2	53
SS2-1/2- <u>  </u>	2 1/2	63
SS3- <u>  </u>	3	78
SS3-1/2- <u>  </u>	3 1/2	91
SS4- <u>  </u>	4	103
SS5- <u>  </u>	5	129

\* Metric size designator (ANSI C80.1-1994).

Cat. No.	Colour
<b>SS-1</b>	
_ = space for color identifier	
G = Gray	
W = White	
B = Blue	
Custom colors also available.	

