


TECK CABLE FITTINGS / ACWU

90° Watertight Fittings and Non Watertight Fittings



90° Watertight Fittings

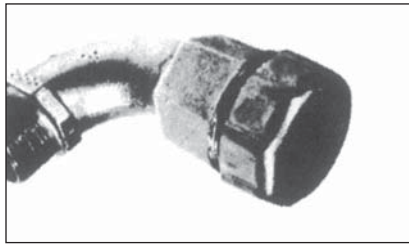

Cat. No.	Hub Thread Size (in.)	Neoprene bushing		Throat Dia. (in.)
		min.	max.	
10601	1/2	0.625	0.760	0.615
10602-TB	1/2	0.750	0.885	0.615
10603	1/2	0.875	0.985	0.615
10604-TB	3/4	0.880	1.065	0.825
10605	3/4	1.055	1.205	0.825
10606-TB	1	1.187	1.375	1.000

Materials

Malleable Iron: The above listed catalogue numbers relate to malleable iron fittings with a protective grounding sleeve for jacketed metal-clad cable.

Certifications

Type HLA. CSA Certified Classes I, II and III. These fittings are suitable for Class I hazardous locations when used in combination with a certified Class I hazardous location sealing fitting. CSA File No. LR-23086.

Type OLA. UL Listed. These fittings are suitable for use with interlocked jacketed cable, aluminum or steel armor. UL File No. E-38947.



Non Watertight Fittings



Cat. No.	Hub Size (in.)	Armor O.D.	
		min.	max.
10000	3/4	0.562	0.800
10001	1	0.687	0.950
10002	1-1/4	1.000	1.344
10003	1-1/2	1.313	1.563
10004	2	1.563	2.000
10005	2-1/2	2.000	2.469

Material: Malleable iron

CSA File No. LR-4484

Type OLA. UL Listed. These fittings are suitable for use with interlocked jacketed cable, aluminum or steel armor. UL File No. E-38947.



Non Watertight Fittings



Cat. No.	Hub Size (in.)	Armor O.D.	
		min.	max.
10000AL	3/4	0.562	0.800
10001AL	1	0.687	0.950
10002AL	1-1/4	1.000	1.344
10003AL	1-1/2	1.313	1.563
10004AL	2	1.563	2.000
10005AL	2-1/2	2.000	2.469

Material: Aluminum

CSA File No. LR-4484

Type OLA. UL Listed. These fittings are suitable for use with interlocked jacketed cable, aluminum or steel armor. UL File No. E-38947.